


GROHE SPECIAL FITTINGS

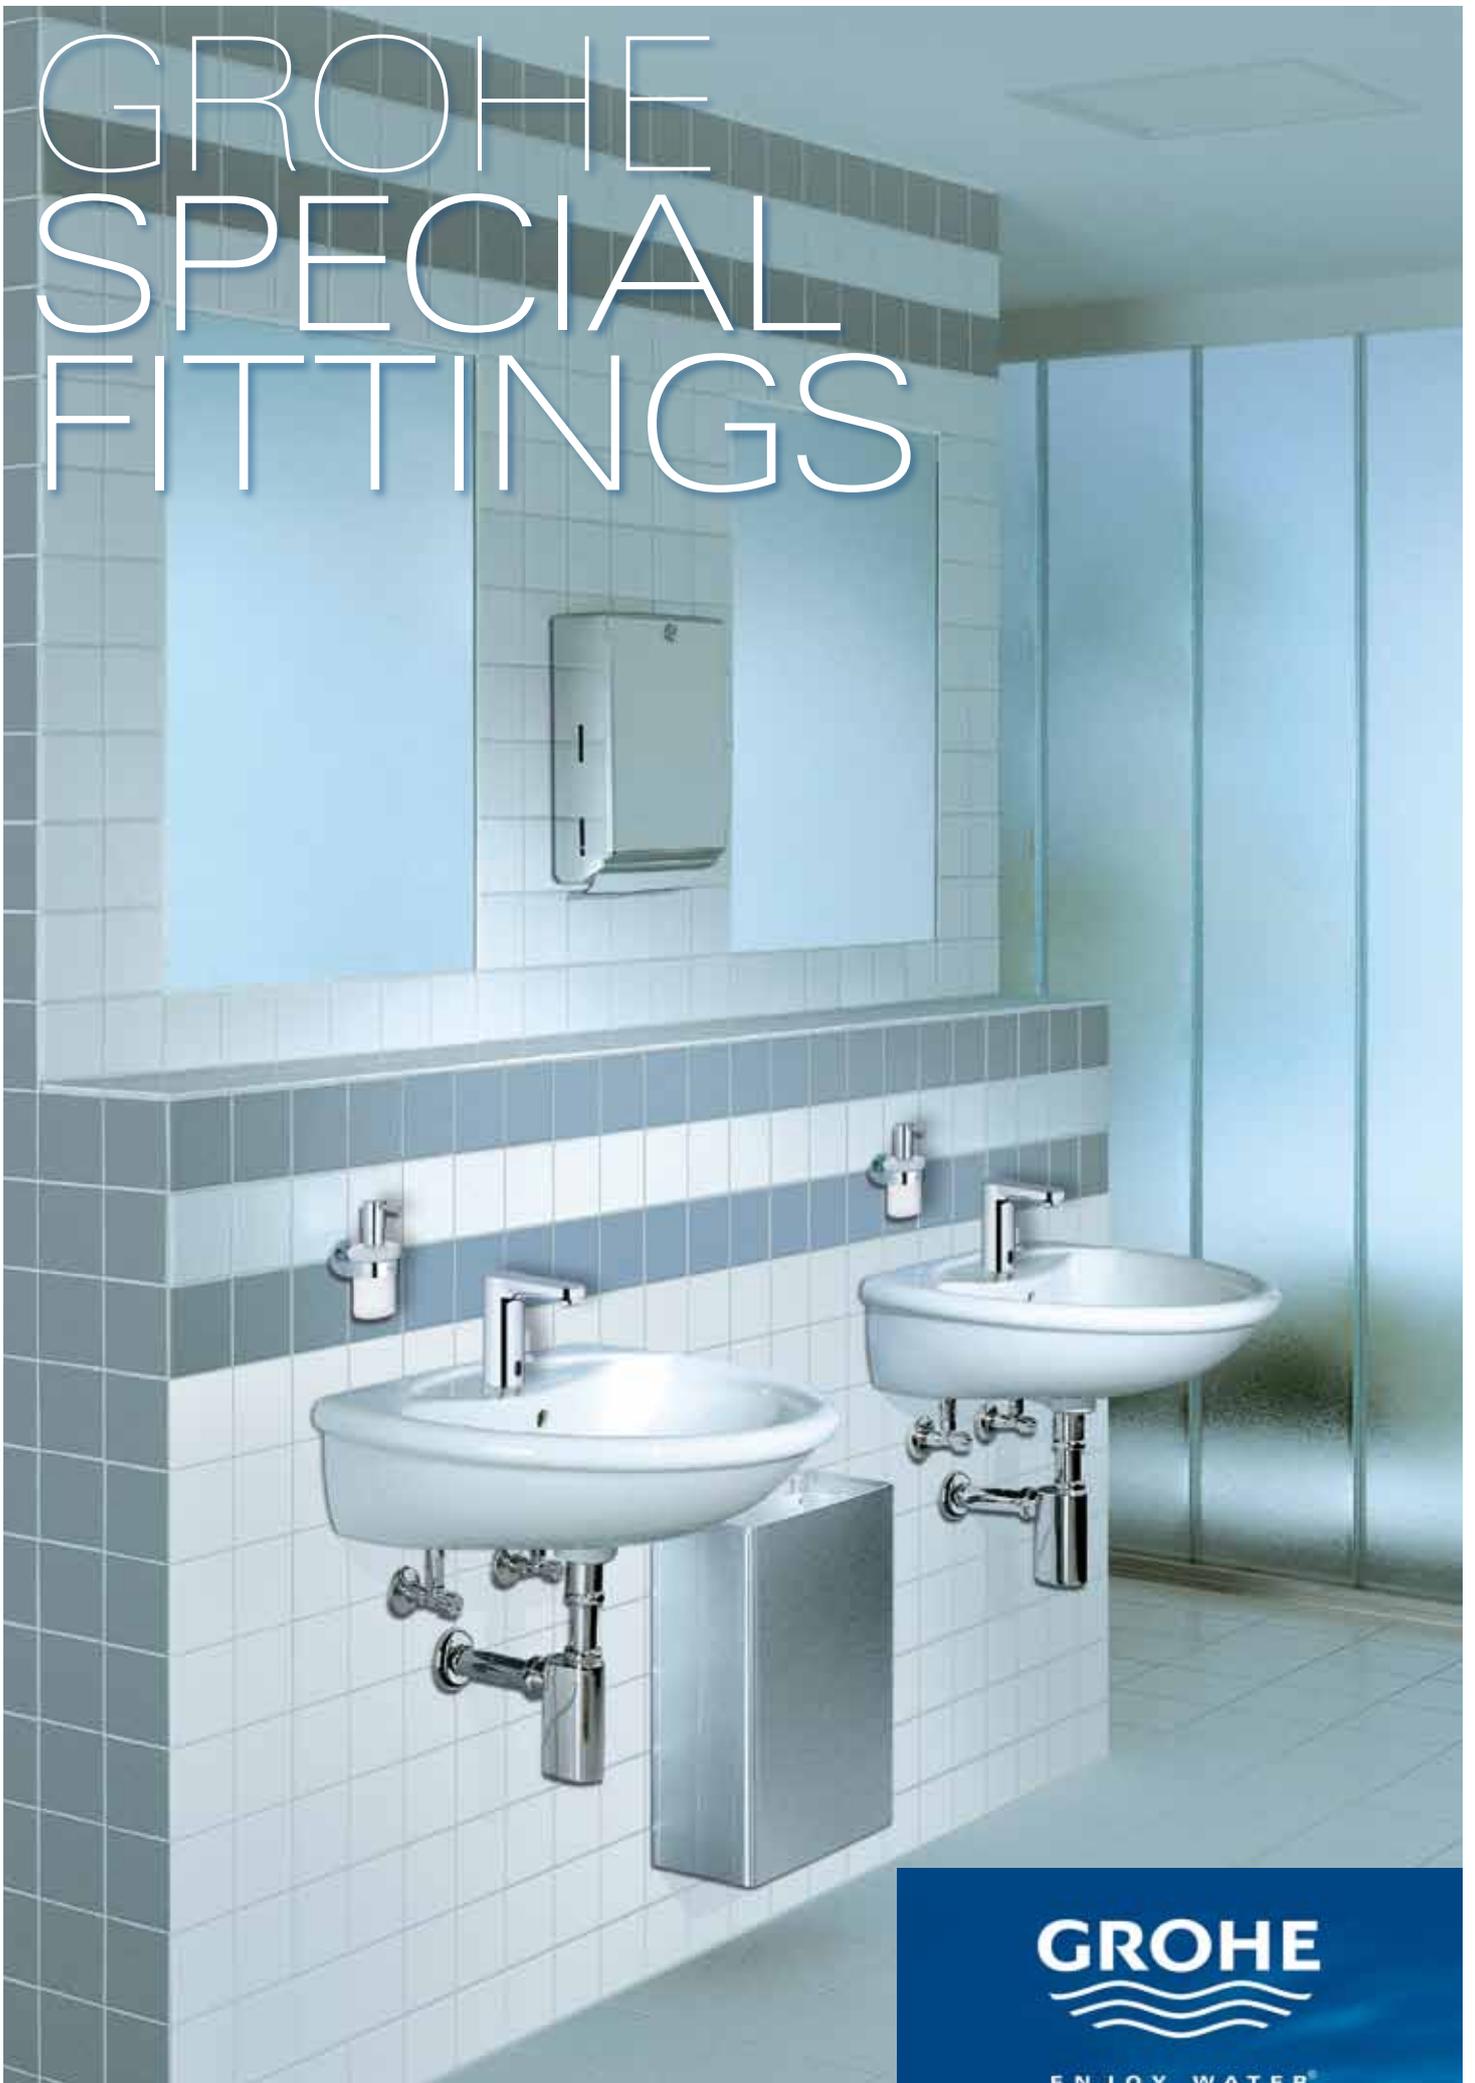

GROHE
ENJOY WATER®

GROHE SPECIAL FITTINGS

When it comes to responsible utilisation of water GROHE will give you professional support on which fitting to choose. Our fittings meet highest requirements in public and commercial applications convincing through a clear, straight and functional design. As the world's leading sanitary brand, GROHE has a long track record at developing reliable fittings for public and contract environments. Whether at Disney World Florida, McLaren Technology Center, Aachen University Hospital or Istanbul Airport - GROHE's high-quality fittings are installed all over the world.



SPECIAL FITTINGS



02

TOUCH-FREE FITTINGS



12

SELF-CLOSING FITTINGS



32

THERMOSTATS



50

SINGLE-LEVER MIXERS



66

CONTENTS

Grundanforderungen	6
German hygiene regulations and requirements	8
Cost effectiveness	10
Touch-free fittings	12
Allure E	16
Essence E	18
Europlus E	20
Eurosmart Cosmopolitan E	24
Euroeco Cosmopolitan E	28
Self-closing fittings	32
Eurodisc SE	36
Contromix	40
Eurosmart Cosmopolitan S	42
Euroeco Cosmopolitan S	46
Thermostats	50
Grohtherm XL	54
Grohtherm 2000 Special	56
Grohtherm Micro	50
Grohtherm Ergomix	62
Special Single-lever mixers	66
Euroeco Special safety mixers	70
Euroeco Special	74

BASIC REQUIREMENTS

Public and contract environments make strict and wide-ranging demands on sanitary installations from compliance with detailed hygiene requirements and vandal-proof design through to a focus on cost effectiveness. Easy operation and maximum user safety are basic requirements met by all GROHE fittings for domestic as well as public and contract applications.



Reliable functionality.

When specifying GROHE for public and contract facilities there is no reason to compromise on stylish design and excellent functionality. The simple and easy operation of all GROHE special fittings is self-evident and, coupled with service-friendly design, makes GROHE the first choice for installers, maintenance engineers and users alike.



Convincing safety.

Planners, plumbers and property managers can rely on the high functional safety of GROHE products. Numerous quality and approval certificates reflect GROHE's commitment to quality and safety, for example our temperature limiters and thermostats prevent scalding.



Optimum hygiene.

Hygiene is a top priority in public spaces and many contract environments from medical facilities to food processing plants. GROHE's touch-free fittings meet the rigorous demands of these environments.

All GROHE fittings have smooth surfaces with no corners and crevices where dirt can accumulate making GROHE fittings easy to clean and particularly resistant to soiling - water drips off immediately and furring is prevented. In order to ensure perfectly hygienic water, and to prevent the formation of legionellae, biofilms and similar disease due to stagnating water, some GROHE models offer automatic flushing function at pre-set intervals as well as thermal disinfection.



Vandal-proof design.

Fittings in public buildings need special protection against vandalism. GROHE offers special solutions that help counteract vandalism and effectively prevent intentional flooding. Concealed installation, automatic shut-off valves, locks and special materials such as stainless steel are just some of the model-specific solutions that provide additional protection against vandalism.

Bright and well-illuminated public facilities can also make a key contribution to preventing vandalism by positively influencing the behaviour of users.

GROHE TOUCH-FREE FITTINGS

German hygiene regulations and requirements

Wash basin fittings must not be hand-operable in the following areas:



In motorway service centres.

Applicability:

- Service centres operated by Autobahn Tank & Rast GmbH & Co. KG

Wash basin fittings operated without hand contact are installed in the sanitary facilities of Tank & Rast service centres (Sanifair)

Regulations:

- Requirements of Autobahn Tank & Rast GmbH & Co. KG (Sanifair guarantee)

Wash basin fittings must not be hand-operable in the following areas:



In milk-processing companies.

Applicability:

- Companies for the production and marketing of raw milk, heat-treated milk and milk-based products, such as in: Dairies, collection centres, processing plants for dairy products. Milk processing rooms shall have an adequate number of facilities with hot and cold running water, or water pre-mixed to a suitable temperature, for cleaning and disinfecting hands. In work rooms and lavatories faucets must **not be hand-operable**.

Regulations:

- Council Directive 94/71/EEC of December 13th, 1994 amending Directive 92/46/EEC



Wash basin fittings must not be hand-operable in the following areas:



In meat-processing companies.

Applicability:

- Companies in which health problems affecting intra-community trade in meat products may arise (EEC Directive), such as in: abattoirs, meat cutting and processing companies, meat departments with fresh meat, butchers shops, meat-processing industry.

Companies shall afford an adequate number of facilities with hot and cold running water, or water pre-mixed to a suitable temperature, for cleaning and disinfecting hands. In work rooms and lavatories, faucets must **not be hand-operable**.

- All companies subject to the hygiene requirements governing trade in meat products. (meat hygiene regulations).

Cleaning facilities must be installed as close as possible to the workplace and in sufficient numbers, with faucets which must **not be hand-operable**.

Lavatories must be provided with facilities for washing hands, with faucets which must **not be hand-operable**.

Regulations:

- Council Directive 92/5/EEC of February 10th, 1992 amending and updating Directive 77/99/EEC and amending Directive 64/433/EEC
- Regulation governing meat hygiene dated June 29th, 2001 (as amended)

Wash basin fittings must not be hand-operable in the following areas:



In medical areas.

Applicability:

- In business operations and parts thereof in which people are to be examined, treated or nursed as inpatients, in which people are medically examined or treated as outpatients, in which body tissue, fluids and secretions of people or animals are analysed or in which work is carried out on pathogenic germs. Also wherever infectious or potentially infectious objects and substances are disinfected or where animals undergo veterinary examination or treatment, such as in: hospitals, medical laboratories, doctors' surgeries, therapeutic surgeries, dissecting rooms, specialist surgeries, emergency rescue and ambulance vehicles, operating theatres.

In working areas with increased risk of infection, faucets which can be operated without hand contact must be installed at the wash basins for use by the personnel.

Regulations:

- BvG C8 Health Service (formerly VBG 103 - accident prevention regulation -) dated October 1st, 1982 - updated version –

COST EFFECTIVENESS



Built-in cost effectiveness.

GROHE fittings offer exceptional value. With relatively low acquisition costs our range of special fittings offers a host of features to keep your water, energy and maintenance costs to a minimum. Even in the most demanding contract installations, our fittings ensure water only runs when required and at the necessary temperature. See for yourself how cost-effectively GROHE special fittings work.

Conventional one-hand lever mixer

12 ltr/min flow

Self-closing fitting Eurosmart Cosmopolitan S

5.8 ltr/min flow
Flow time 7 sec

Self-closing fitting Eurodisc SE

5.8 ltr/min flow
Flow time 7 sec

Touch-free fitting Eurosmart Cosmopolitan E

5.8 ltr/min flow

Basis: 150 uses per day, 250 days per year.

Conventional fitting

With showerhead

12 ltr/min flow

Self-closing shower thermostat Eurodisc SE


with combination of Eurodisc showerhead

a) 12 ltr/min flow

b) 9 ltr/min flow

Basis: 50 x use per day, 250 x use per year

Save water when washing your hands.

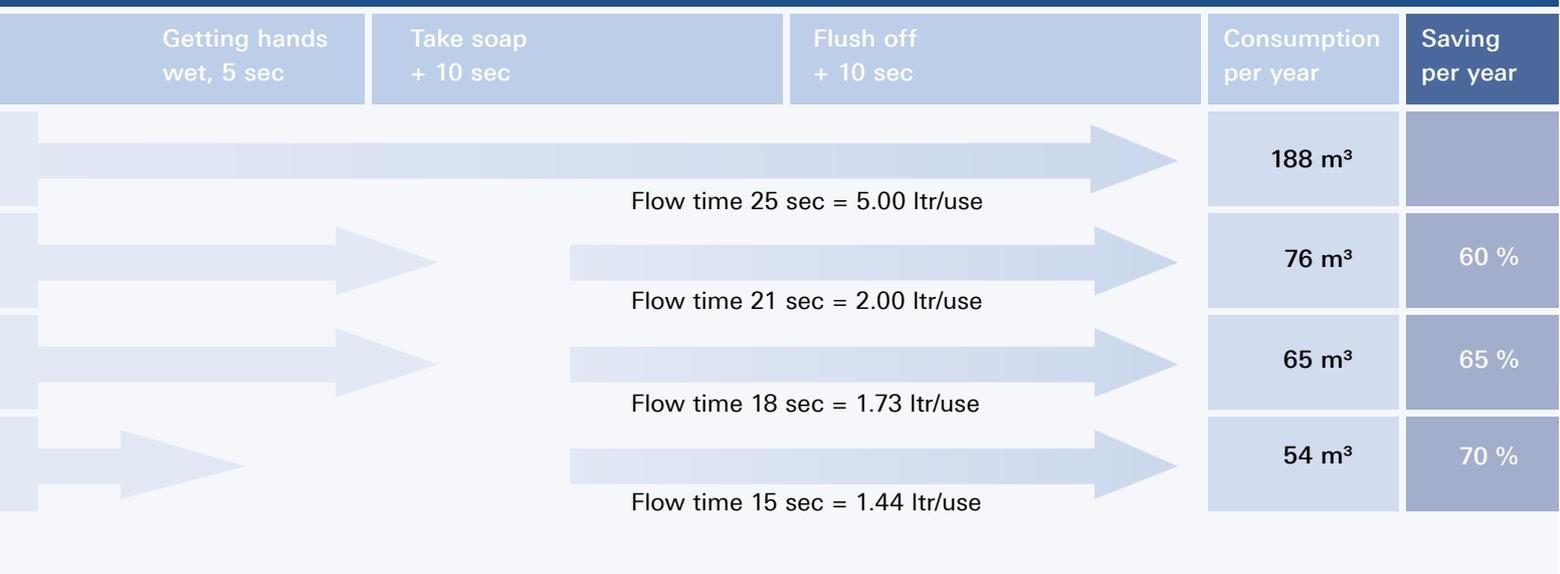

Save water when showering.



GROHE TOUCH-FREE FITTINGS

GROHE makes using water as convenient, economical and safe as possible. Touch-free fittings meet the highest demands for hygiene and user comfort. Nothing has to be touched. Moreover, these fittings help keep costs low by dispensing water only when needed.

Another benefit is the wide range of individual solutions for different needs.





GROHE TOUCH-FREE FITTINGS

High-tech for the highest demands

Typical areas of application:

- Public sanitary facilities
- Health sector
- Food processing industry

Typical demands:

- Hygiene
- Economy
- Durability



Frankfurt Airport/Germany



Food processing industry



*Waldkrankenhaus Spandau/Germany
Photo: Werner Huthmacher*





Darmstadtium, Wissenschafts- und Kongresszentrum, Darmstadt/Germany, Photo: juergenmai.com

GROHE ALLURE E

When high-class design is as important as water efficiency and touch-free operation, choose Allure E. With its elegant and sophisticated meeting of curves, cylinders and cubes, the range extends our successful Allure collection of faucets and fittings. A choice of mounting options and battery or mains operation ensures the design meets all of the installation requirements of your projects; while its cosmopolitan styling and refined details make it the perfect choice for luxury hotels, bars and restaurants.

Meet the installation requirements of your project

Allure E offers a choice of wall-mounted and deck-mounted basin faucets. Deck-mounted models are available with or without a mixing device and can be either battery or mains (230V) operated.

The convenient and ecological choice

For reduced power consumption, the latest energy-efficient electronics extend battery life to seven years, while a flow rate of only 5.8 l/min and automatic shut-off ensure economical use of water.

Easy to program

The remote control 36 206 000 allows you to easily programme individual settings, such as increasing or decreasing the detection area of the infrared beam.



GROHE EcoJoy™



GROHE StarLight®



LongLifeBattery

GROHE features:
TouchFree
InvisibleFasteningSystem



36 235 000 Allure E

Infra-red electronic for wash basin, 1/2", wall-mounted, chrome, set for final installation for Rapid SL 38 748 001 or roughing-in set 36 264 000, spout 172 mm, transformer 230 V AC, thermal disinfection



36 098 000 Allure E

Infra-red electronic for wash basin, 1/2", with mixing device, battery supply 6 V, chrome



36 095 000 Allure E

Infra-red electronic for wash basin, 1/2", with mixing device, transformer 230 V, chrome



36 099 000 Allure E

Infra-red electronic for wash basin, 1/2", without mixing device, battery supply 6 V, chrome



36 234 000 Allure E

Infra-red electronic for wash basin, 1/2", with mixing device, battery supply 6 V, with pop-up waste set, chrome



36 096 000 Allure E

Infra-red electronic for wash basin, 1/2", without mixing device, transformer 230 V, chrome



36 097 000 Allure E

Infra-red electronic for wash basin, 1/2", with mixing device, transformer 230 V, with pop-up waste set, chrome

GROHE ESSENCE E

Touch free, easy to clean, robust and ergonomic – the Essence E collection of infrared electronic faucets is designed for high-traffic areas where design and function are equally important. Airports, restaurants and offices are just a few of the places that will benefit from its cosmopolitan design. Balanced and poised, Essence E explores the purity of the cylindrical form and adheres to the same modern aesthetic as our successful Essence collection.

Designs for all types of installation

Wall-mounted and deck-mounted models ensure compatibility with all of your installation requirements. Deck-mounted models are available with and without a mixing device and can be either battery or mains (230 V) operated.

Latest energy and water saving features

A reduced flow rate of 5.8 l/min and automatic shut-off ensures Essence E combines style with economical features; while energy-efficient electronics extend battery life to seven years.

Easy programming of the faucet settings

The remote control 36 206 000 allows you to easily programme individual settings, such as increasing or decreasing the detection area of the infrared beam.



GROHE EcoJoy™



GROHE StarLight®



LongLifeBattery

GROHE features:
TouchFree
InvisibleFasteningSystem



36 252 000 Essence E

Infra-red electronic for wash basin, 1/2", wall-mounted, chrome, set for final installation for Rapid SL 38 748 001 or roughing-in set 36 264 000



36 092 000 Essence E

Infra-red electronic for wash basin, 1/2", with mixing device, battery supply 6 V, chrome



36 088 000 Essence E

Infra-red electronic for wash basin, 1/2", with mixing device, transformer 230 V, chrome



36 093 000 Essence E

Infra-red electronic for wash basin, 1/2", without mixing device, battery supply 6 V, chrome



36 094 000 Essence E

Infra-red electronic for wash basin, 1/2", with mixing device, battery supply 6 V, with pop-up waste set, chrome



36 089 000 Essence E

Infra-red electronic for wash basin, 1/2", without mixing device, transformer 230 V, chrome



36 091 000 Essence E

Infra-red electronic for wash basin, 1/2", with mixing device, transformer 230 V, with pop-up waste set, chrome

GROHE EUROPLUS E

Extremely safe - very attractive - highly economical: GROHE's touch-free fittings offer a decisive advantage:

The optional remote control (36 206 000) can activate an automatic flushing mode (in 1-day or 3-day intervals), effectively prevents stagnating water and the formation of legionellae when the fitting is not used for an extended period of time protecting the quality of the water. Europlus E also makes it easy to ensure perfect hygiene; touchless operation prevents the proliferation of bacteria and viruses while offering unsurpassed user comfort. The low operating costs, from the economical use of water and energy, and their attractive price/performance ratio make Europlus E a very cost-effective solution. The battery-powered models rely on standard 6 volt batteries with a life of more than 7 years assuming 150 operations per day.



GROHE EcoJoy™



GROHE StarLight®



LongLifeBattery

GROHE features:
TouchFree
InvisibleFasteningSystem




Mixing device



Hidden mixing device



With hidden rotation lock

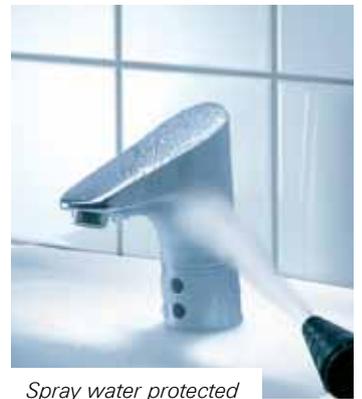

Spray water protected

Economical, ecological, hygienic.

- thermal disinfection at the touch of a button without having to re-adjust the thermostat
- certification to high IP protection classes (IP 59K, protection against the penetration of water)
- temperature limiters
- vandal-resistant rotation lock (42 919 000) can be retrofitted on all single-hole fittings
- thermostats for wall-mounted fittings (exception 36 241 000):
 - prevent safety hazards in case of elevated water temperatures
 - or a hot water lock for single-hole mixers.

Individual setting by remote control.

The infrared remote control 36 206 000 allows you to easily make individual settings such as changing the detection area, activating the automatic flushing mode, and modifying the run-on time.

GROHE EUROPLUS E



36 207 000 Europlus E

Infra-red electronic for wash basin, with mixing device, 1/2", battery powered, thermal disinfection



36 015 000 Europlus E

Infra-red electronic for wash basin, with mixing device, 1/2", with 230 V power supply unit, 50 Hz, 3.2 VA, thermal disinfection



34 197 000 Europlus E

Infra-red electronic for wash basin, with mixing device, 1/2", with 230 V power supply unit, 50 Hz, 3.2 VA, thermal disinfection, for open water heater



36 236 000 Europlus E

Infra-red electronic for wash basin, with mixing device, 1/2", battery powered, thermal disinfection, with pop-up waste set 1 1/4"



36 208 000 Europlus E

Infra-red electronic for wash basin, without mixing device, 1/2", battery powered, thermal disinfection



36 208 000 Europlus E

Infra-red electronic for wash basin, without mixing device, 1/2", with 230 V power supply unit, 50 Hz, 3.2 VA, thermal disinfection



36 241 000 + 36 243 SD0 Europlus E

Infra-red electronic for wash basin, without mixing device, concealed box (36 241 000), wall plate and handle set (36 243 SD0), 170 mm spout, 230 V AC, thermal disinfection



36 009 000 + 36 243 SD0 Europlus E

Infra-red electronic for wash basin, with pre-set thermostatic mixer unit (36 009 000), wall plate and handle set (36 243 SD0), 170 mm spout, 230 V AC, thermal disinfection



36 241 000 + 36 242 SD0 Europlus E

Infra-red electronic for wash basin, without mixing device, concealed box (36 241 000), wall plate and handle set (36 242 SD0), 170 mm spout, 230 V AC, thermal disinfection



GROHE EcoJoy™



GROHE StarLight®



LongLifeBattery

GROHE features:
TouchFree
InvisibleFasteningSystem



**36 009 000 + 36 242 SD0
Europlus E**

Infra-red electronic for wash basin, with pre-set thermostatic mixer unit (36 009 000), wall plate and handle set (36 242 SD0), 170 mm spout, 230 V AC transformer, thermal disinfection



36 021 000 Europlus E

Infra-red electronic for wash basin, without mixing device, outlet 3/4", battery supply 6 V, thermal disinfection

42 132 000, spout 192 mm
42 133 000, spout 160 mm



36 042 SD0 Europlus E

Infra-red electronic for wash basin, without mixing device, set for final installation for 38 748 001 or concealed mounting box 36 264 000, spout 170 mm, transformer 230 V AC, thermal disinfection



36 240 000 Europlus E

Infra-red electronic for wash basin, with thermostat, 1/2", wall-mounted, GROHE CoolTouch® housing, swivel spout, projection 249 mm, battery powered, thermal disinfection



36 239 000 Europlus E

Infra-red electronic for wash basin, with thermostat, 1/2", wall-mounted, GROHE CoolTouch® housing, swivel spout, projection 281 mm, battery powered, thermal disinfection



36 206 000

Infra-red remote control for all Europlus E



42 919 000

Rotation lock, vandal-resistant, for Europlus E and Eurodisc SE



34 023 000 Grohtherm Micro

Thermostatic scalding protection/under-basin thermostat for installation on the angle valve



47 533 000

Connection set for fittings with mixer

36 209 000

Hidden mixing device for Europlus E and Eurodisc SE

GROHE EUROSMART COSMOPOLITAN E

Balancing touch-free operation with stylish design, Eurosmart Cosmopolitan E commands attention. From above, the keyhole shape of the spout gives the range its distinctive look, with the same silhouette repeating on the temperature control lever. The smooth transition from body to spout ensures maximum hygiene and easy cleaning. The design is enhanced with the latest infrared technology and complements our Eurosmart Cosmopolitan collection, which offers an extensive range of basin, shower and bath fittings.



GROHE EcoJoy™



GROHE StarLight®



LongLifeBattery

GROHE features:
SmartFix
TouchFree



Battery mounted in a waterproof casing under the wash basin.



Temperature control

Smart technology and intelligent features

The latest technologies allow the programming of different functions including automatic rinsing at fixed intervals to avoid stagnation. A cleaning mode disables the sensor for three minutes, allowing personnel to clean the basin without accidentally triggering the water flow. Variable reach settings ensure compatibility with all basin materials and, for convenience, the main settings can be changed manually or by remote control.

Water and energy saving technologies

The infrared sensor ensures water is dispensed only when needed, while a safety stop feature prevents continuous flow. With a maximum flow rate of 5.8 l/min Eurosmart Cosmopolitan E is a smart addition to our GROHE EcoJoy™ range.


Engineered for long-term use

The robust GROHE StarLight® chrome surface resists scratches to ensure long-term durability, while an optional rotation lock protects against vandalism. Long-life electronics extend the battery life to seven years. When the battery is low a blinking LED alerts staff.

Individual setting by remote control

The remote control 36 206 000 allows you to program individual settings such as changing the detection area of the sensor and activating thermal disinfection.

GROHE EUROSMART COSMOPOLITAN E

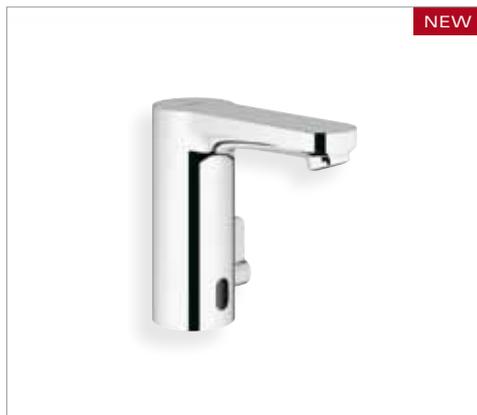


NEW

36 325 000

Eurosmart Cosmopolitan E

Infra-red electronic basin mixer, with mixing device, with switch-mode power supply 100-230 V AC, type of protection faucet IP 56, certificate applied for

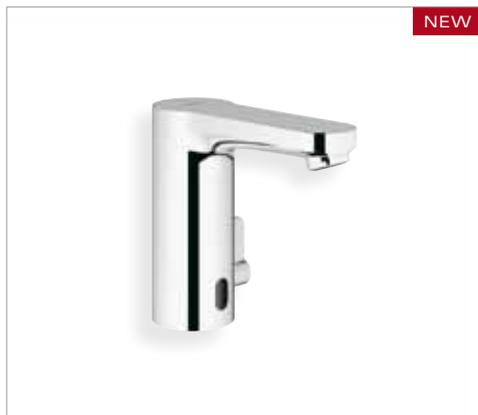


NEW

36 327 000

Eurosmart Cosmopolitan E

Infra-red electronic basin mixer, with mixing device, battery supply 6 V, external battery type of protection faucet IP 56, certificate applied for

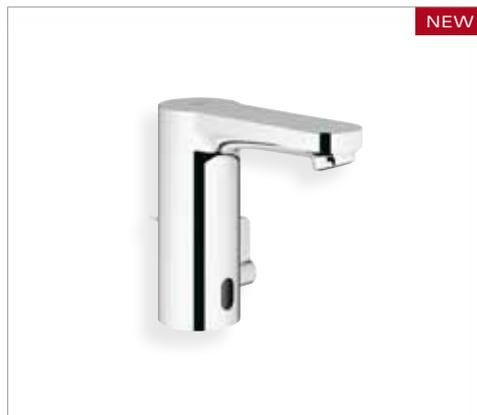


NEW

36 331 000

Eurosmart Cosmopolitan E

Infra-red electronic basin mixer, with mixing device, pop-up waste set 1 1/4", battery supply 6 V, external battery, type of protection faucet IP 56, certificate applied for

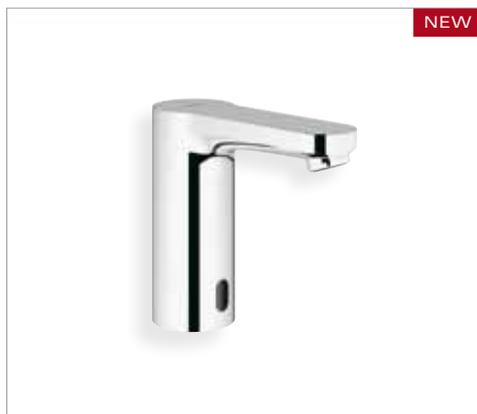

NEW

36 330 000

Eurosmart Cosmopolitan E

Infra-red electronic basin mixer, with hidden mixing device, battery supply 6 V, external battery, type of protection faucet IP 56, certificate applied for




NEW

36 332 000

Eurosmart Cosmopolitan E

Infra-red electronic wash basin thermostat, 1/2", swivel cast spout 280 mm, battery supply 6 V

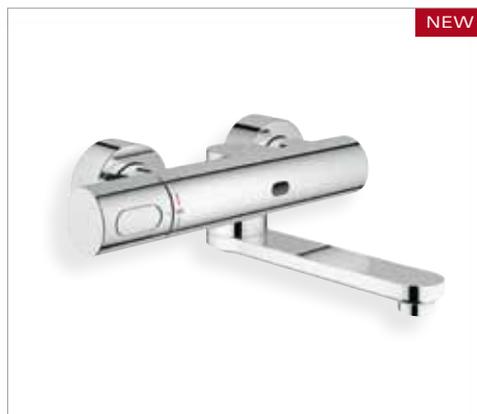

NEW

36 333 000

Eurosmart Cosmopolitan E

Infra-red electronic wash basin thermostat, 1/2", swivel cast spout 230 mm, battery supply 6 V



NEW

36 334 SD0

Eurosmart Cosmopolitan E

Infra-red electronic basin tap, for cold or premixed water, set for final installation, transformer 230 V AC, stainless steel escutcheon, stainless steel spout 230 mm



NEW

36 335 SD0

Eurosmart Cosmopolitan E

Infra-red electronic basin tap, for cold or premixed water, set for final installation, transformer 230 V AC, stainless steel escutcheon, stainless steel spout 170 mm



NEW

36 336 000

Eurosmart Cosmopolitan E

Concealed mounting box with integrated pre-adjustable thermostatic mixer, suitable for IR-sets for final installation, 2 stop valves



GROHE EcoJoy™



GROHE StarLight®



LongLifeBattery

GROHE features:
SmartFix
TouchFree

NEW



36 337 000

Eurosmart Cosmopolitan E

Concealed mounting box, for cold or premixed water, suitable for IR-sets for final installation, stop valve, connection housing for power supply

NEW



36 315 000

Eurosmart Cosmopolitan E

Infra-red electronic basin tap, for cold or premixed water, set for final installation, transformer 230 V AC, stainless steel escutcheon, stainless steel spout 230 mm

NEW



36 339 000

Concealed mounting box with mixture, wall installation, suitable for IR-sets for final installation, 2 stop valves, connection housing for power supply

GROHE EUROECO COSMOPOLITAN E

Designed to meet the demands of heavily frequented public sanitary facilities, Euroeco Cosmopolitan E uses infrared technology to supply only the amount of cold or pre-mixed water actually needed. Plus, as the user never needs to touch the faucet, bacteria transfer is greatly reduced. Featuring pared down lines and embracing a distinctive lozenge shape for the spout and infrared sensor, the design offers perfect hygiene and first-class design at an attractive price. For convenience, the main settings can be changed by hand or remote control.



GROHE EcoJoy™



GROHE StarLight®



LongLifeBattery

GROHE features:
SmartFix

More hygiene and more features

To prevent water stagnation, Euroeco Cosmopolitan E can be programmed for automatic flushing at different intervals. Cleaning staff can also deactivate the infrared detection function for three minutes. The reach setting of the sensor can be adapted to suit the material of your basin. Main settings can be changed either on the faucet or by using the remote control.

Intelligent features for water and energy saving

The infrared sensor ensures water is dispensed only when needed. An integrated safety stop feature prevents water wastage, should an object be placed in front of the sensor.

Designed for the long-term use

The immaculate GROHE StarLight® chrome surface resists scratches to ensure long-term durability. Long-life electronics extend the battery life to seven years. When it's time to replace the battery, an LED on the faucet flashes – replacement is easy as the battery and the solenoid valve are mounted below the wash basin.



Battery and solenoid valve are connected to the valve



Battery mounted in a waterproof casing under the wash basin.



Solenoid valve mounted under wash basin, directly onto angle valve

GROHE EUROECO COSMOPOLITAN E



GROHE EcoJoy™



GROHE StarLight®



LongLifeBattery

GROHE features:
SmartFix

NEW



36 269 000

Euroeco Cosmopolitan E

Infra-red electronic basin tap 1/2", with switch-mode power supply 100-230 V AC, external solenoid valve, type of protection faucet IP 59K (applied)

NEW



36 271 000

Euroeco Cosmopolitan E

Infra-red electronic basin tap 1/2", battery supply 6 V lithium-battery, external solenoid valve and battery, type of protection faucet IP 59K

NEW



36 274 000

Euroeco Cosmopolitan E

Infra-red electronic basin tap, for cold or premixed water, wall mounted, battery supply 6 V lithium-battery, 1/2" wall mounting housing with solenoid adaptor, metal body

NEW



36 273 000

Euroeco Cosmopolitan E

Infra-red electronic basin tap, for cold or premixed water, set for final installation for concealed fitting box, transformer 230 V AC, chrome escutcheon, chrome spout 170 mm

NEW



36 336 000

Euroeco Cosmopolitan E

Concealed mounting box, with integrated pre-adjustable thermostatic mixer, wall installation, suitable for IR-sets for final installation, 2 stop valves

NEW



36 337 000


Euroeco Cosmopolitan E

Concealed mounting box, for cold or premixed water, wall installation, suitable for IR-sets for final installation

GROHE SELF-CLOSING FITTINGS

GROHE self-closing faucets and showers are renowned for their durability, water-efficiency and robust design. For the end-user the range offers intuitive operation and hygiene; once the user has washed their hands there is no need to touch the fitting again. And as the fittings close automatically, they prevent water wastage – significantly reducing annual running costs.



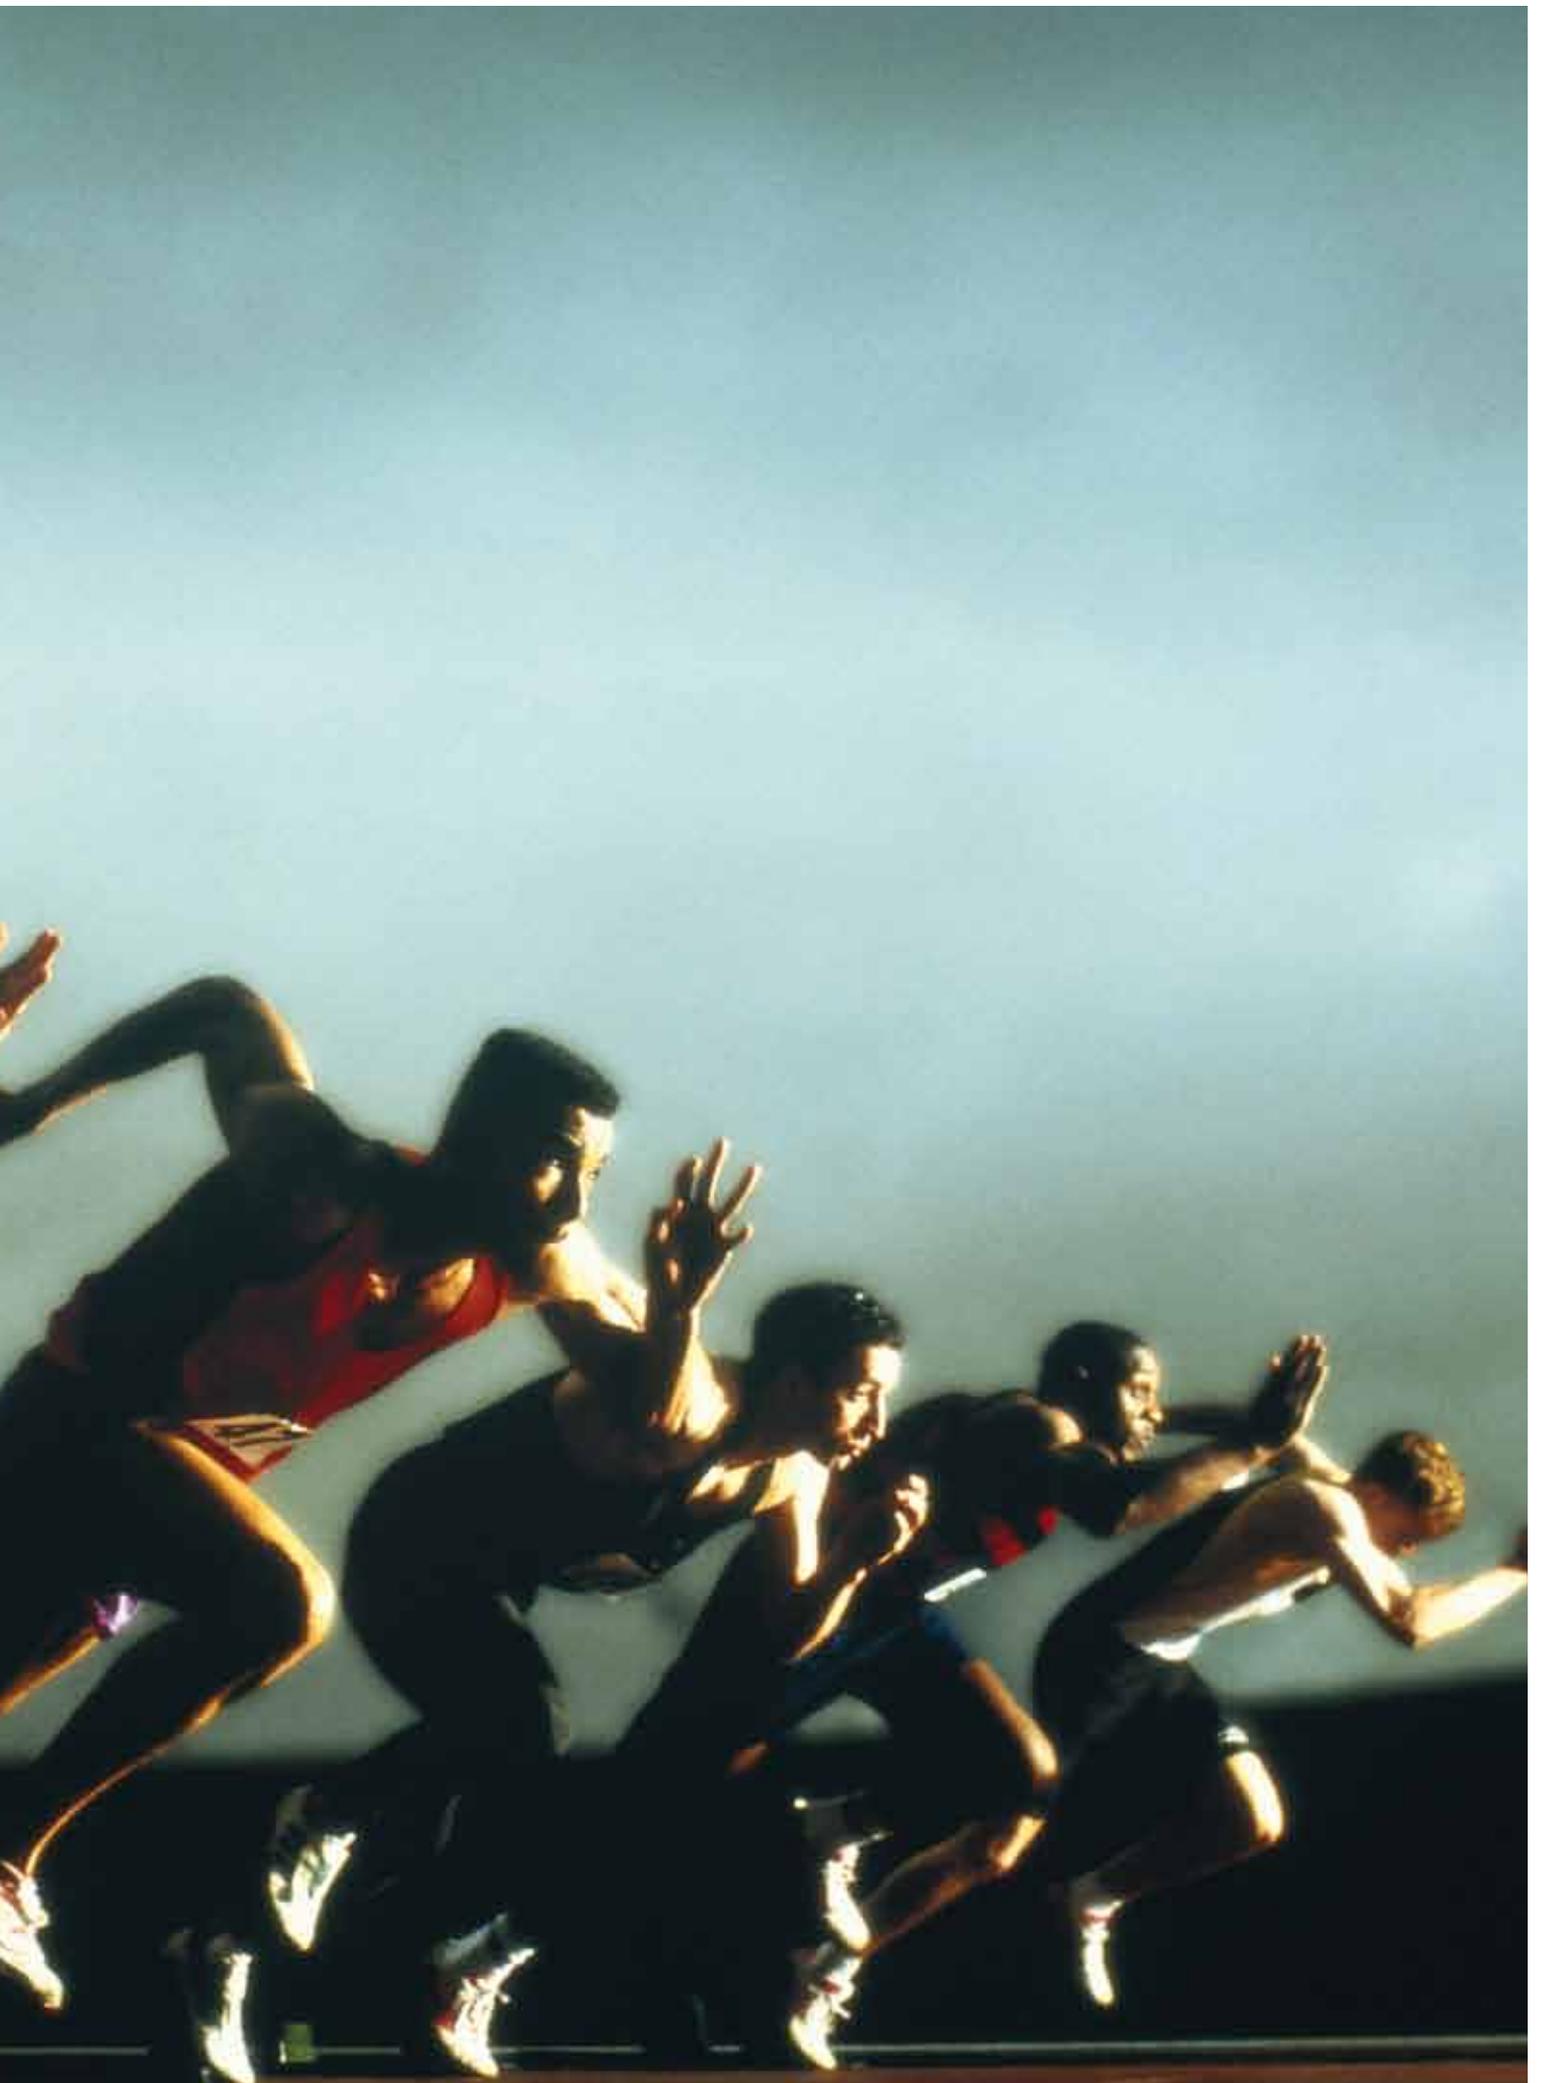

GROHE SELF-CLOSING FITTINGS


Robust fittings minimise water consumption, maximise hygiene.

Typical areas of application:

- Schools and sports halls
- Travel and transport sector, e.g. motorway service areas, airports, stations
- Commerce and industry

Typical demands:

- Economy
- Antivandalism
- Intuitive operation
- Durability

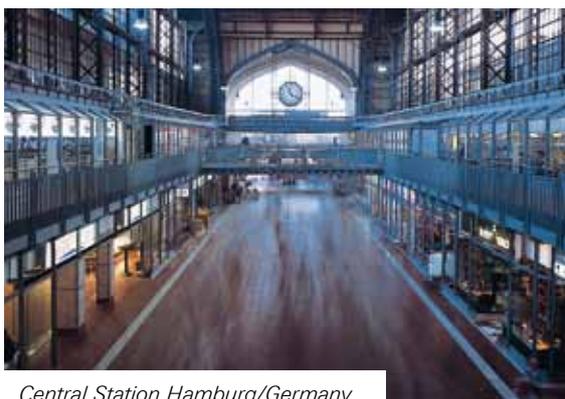



Rudolf-Harbig-Stadion, Dresden/Germany

GROHE EURODISC SE

Superior technology for advanced performance; thermal disinfection for maximum hygiene - Eurodisc SE self-closing faucets and thermostatic shower mixers offer safety and comfort for all users. Flow duration is adjusted electronically and can be set from 2 seconds to 3 minutes to meet the exact specifications of each installation. All faucets also include a start/stop feature, which enables the user to stop the water flow before the pre-set time. Changing the flow time and the setting the thermal disinfection feature are conveniently set by means of tip codes*. No tools are necessary and a re-adjustment of thermostat models is not required. Additional features, such as automatic shut off and a flow rate of only 5.8 l/min for basin faucets and maximum temperature limiters make it the ideal choice for a variety of projects.

*by pressing the top in a certain order - see instructions.



GROHE EcoJoy™



GROHE StarLight®

GROHE features:
ErgoTouch
LongLifeBattery
InvisibleFasteningSystem

The hygienic choice

In addition to single-touch activation for user hygiene, it is also possible to programme automatic flushing at three-day intervals, to prevent water stagnation and enable thermal disinfection of the pipes and fitting (by dispensing water with a temperature of at least 70° C for three minutes). This feature is particularly beneficial for healthcare environments.

Your users are safe in our hands

Eurodisc SE offers safety and comfort every time. In models which offer water temperature regulation, the maximum water temperature is limited by a hot water limit stop, which can be set anywhere between 35° C and 40° C. Shower fittings are additionally equipped with a thermostat.

Water efficient – save money and the environment

Faucets automatically shut off after the maximum flow time of 180 seconds, even if its top has been tampered with and blocked. It is also possible to stop the water before the pre-set time, which, combined with a flow rate of only 5.8 l/min, ensures not a drop is wasted.

Additional areas of application

Eurodisc SE can also be used in combination with pressure tanks as well as thermally and hydraulically controlled water heaters of sufficient capacity (it is not suitable for use in combination with unpressurised tanks).



Metal scale handle



Tamper-proof temperature control



Rotation lock



Hidden mixing device



Adjust hot water limit stop



Battery change (pulsating jet of water)

GROHE EURODISC SE



36 233 000 Eurodisc SE

Self-closing basin mixer, with mixer, 1/2", electronic run-time control, battery powered, thermal disinfection

36 249 000 ditto 36 233 000, but without mixer (for cold water)



36 250 000 Eurodisc SE

Self-closing basin mixer, without mixer (for warm water), 1/2", electronic run-time control, battery powered, thermal disinfection



36 251 000 Eurodisc SE

Self-closing basin mixer, with mixer, 1/2", electronic run-time control, battery powered, pop-up waste set 1/4", thermal disinfection



36 020 000 Europlus E

Self-closing electronic basin tap, 1/2", wall mounted, outlet 3/4", for cold or premixed water, battery powered, thermal disinfection

42 132 000, outlet 192 mm

42 133 000, outlet 160 mm



36 244 000 Eurodisc SE

Self-closing shower thermostat, 1/2", wall-mounted, electronic run-time control, GROHE CoolTouch® housing, top outlet 3/4"



36 245 000 Eurodisc SE

Self-closing shower thermostat, 1/2", wall-mounted, electronic run-time control, GROHE CoolTouch® housing, bottom outlet 1/2"



36 014 000 + 36 247 000 Eurodisc SE

Self-closing shower thermostat, 1/2", concealed box 1/2" with integrated installation box (36 014 000), wall plate and handle set (36 247 000), electronic run-time control



36 248 000 Eurodisc SE

Head shower set with exposed shower tube



12 407 000

Outlet elbow, 1/2", for connecting pipe Ø 18 mm



GROHE EcoJoy™



GROHE StarLight®

GROHE features:
ErgoTouch
LongLifeBattery
InvisibleFasteningSystem



38 893 000 Eurodisc SE

Shower system, self-closing shower thermostat, 1/2", panel of VARICOR® mineral material, arctic white, electronic run-time control, battery supply 6 V lithium, Relaxa sports head shower



42 270 000

Rotation lock, vandal-resistant, for Europlus E



36 209 000

Hidden mixing device for Europlus E and Eurodisc SE



47 639 000

Metal lever, vandal-resistant, for Europlus E 36 239 000, 36 240 000 and Eurodisc SE 36 244 000, 36 245 000, 36 247 000



47 640 000

Tamper-proof temperature control for Europlus E 36 239 000, 36 240 000 and Eurodisc SE 36 244 000, 36 245 000, 36 247 000



34 023 000 Grotherm Micro

Thermostatic scalding protection/under-basin thermostat for installation on the angle valve



28 948 000 Relaxa

Sports head shower, 1/2", projection 148 mm, connection thread 1/2", heavy casted model, theft proof



28 002 000 Relaxa

Sports head shower, 1/2", low aerosol emission, projection 58 mm, connection thread 1/2", heavy casted model, theft proof, suicide-resisting design

GROHE CONTROMIX

Environmentally friendly and cost effective, Contromix self-closing fittings are ideally suited to washrooms and shower facilities in public environments. Ergonomically design and durable, the range facilitates easy and comfortable temperature selection for the user and comes complete with clever water saving feature that allows the user to stop the water flow before the pre-set time.

Smart double stop feature

When you press the top, the water starts to run for a pre-set time of between 5 and 40 seconds. If you finish washing your hands or showering before the pre-set time, simply press the top again to stop the flow – an attractive feature for environmentally-conscious users.

Encourages interaction

The ergonomic design of the top encourages intuitive operation, while the textured outer ring ensures safe temperature setting, even with soapy hands.



GROHE EcoJoy™



GROHE StarLight®



36 109 000 Contromix Public

Self-closing basin mixer, with mixing device, 1/2", economy-stop function

36 110 000 ditto 36 109 000, but with rotation lock



36 113 000 Contromix

Self-closing basin mixer, with mixing device, 1/2", wall-mounted, economy-stop function, swivel spout, projection 260 mm



36 121 000 + 36 122 000 Contromix

Self-closing shower mixer, with mixing device, 1/2", economy-stop function, concealed box (36 122 000), wallplate and handle set (36 121 000)



36 115 000 Contromix Public

Self-closing shower mixer, with mixing device, 1/2", wall-mounted, economy-stop function, outlet elbow

36 117 000 Contromix Public

Self-closing shower mixer, with mixing device, 1/2", wall-mounted, economy-stop function, with exposed shower tube and head shower



36 116 000 Contromix Public

Self-closing shower mixer, with mixing device, 1/2", wall-mounted, economy-stop function, with bottom outlet for hose connections G 1/2" and G 3/4"



34 023 000 Grohtherm Micro

Thermostatic scalding protection/under-basin thermostat for installation on the angle valve



47 533 000


Connecting set for fittings with mixer

45 704 000

Connecting set for fittings without mixer

GROHE EUROSMART COSMOPOLITAN S

Water-efficient and intuitive to use, Eurosmart Cosmopolitan S brings architectural appeal to self-closing faucets and showers. With its keyhole-shaped spout and fluid transitions from body to spout, the feature-packed collection includes basin and shower mixers, making it a practical and stylish addition to public sanitary facilities and showers. For increased user-comfort, the factory-set flow duration of seven seconds for basin mixers can be increased during installation to 15 or 30 seconds – ensuring the range adapts to meet all of your requirements.

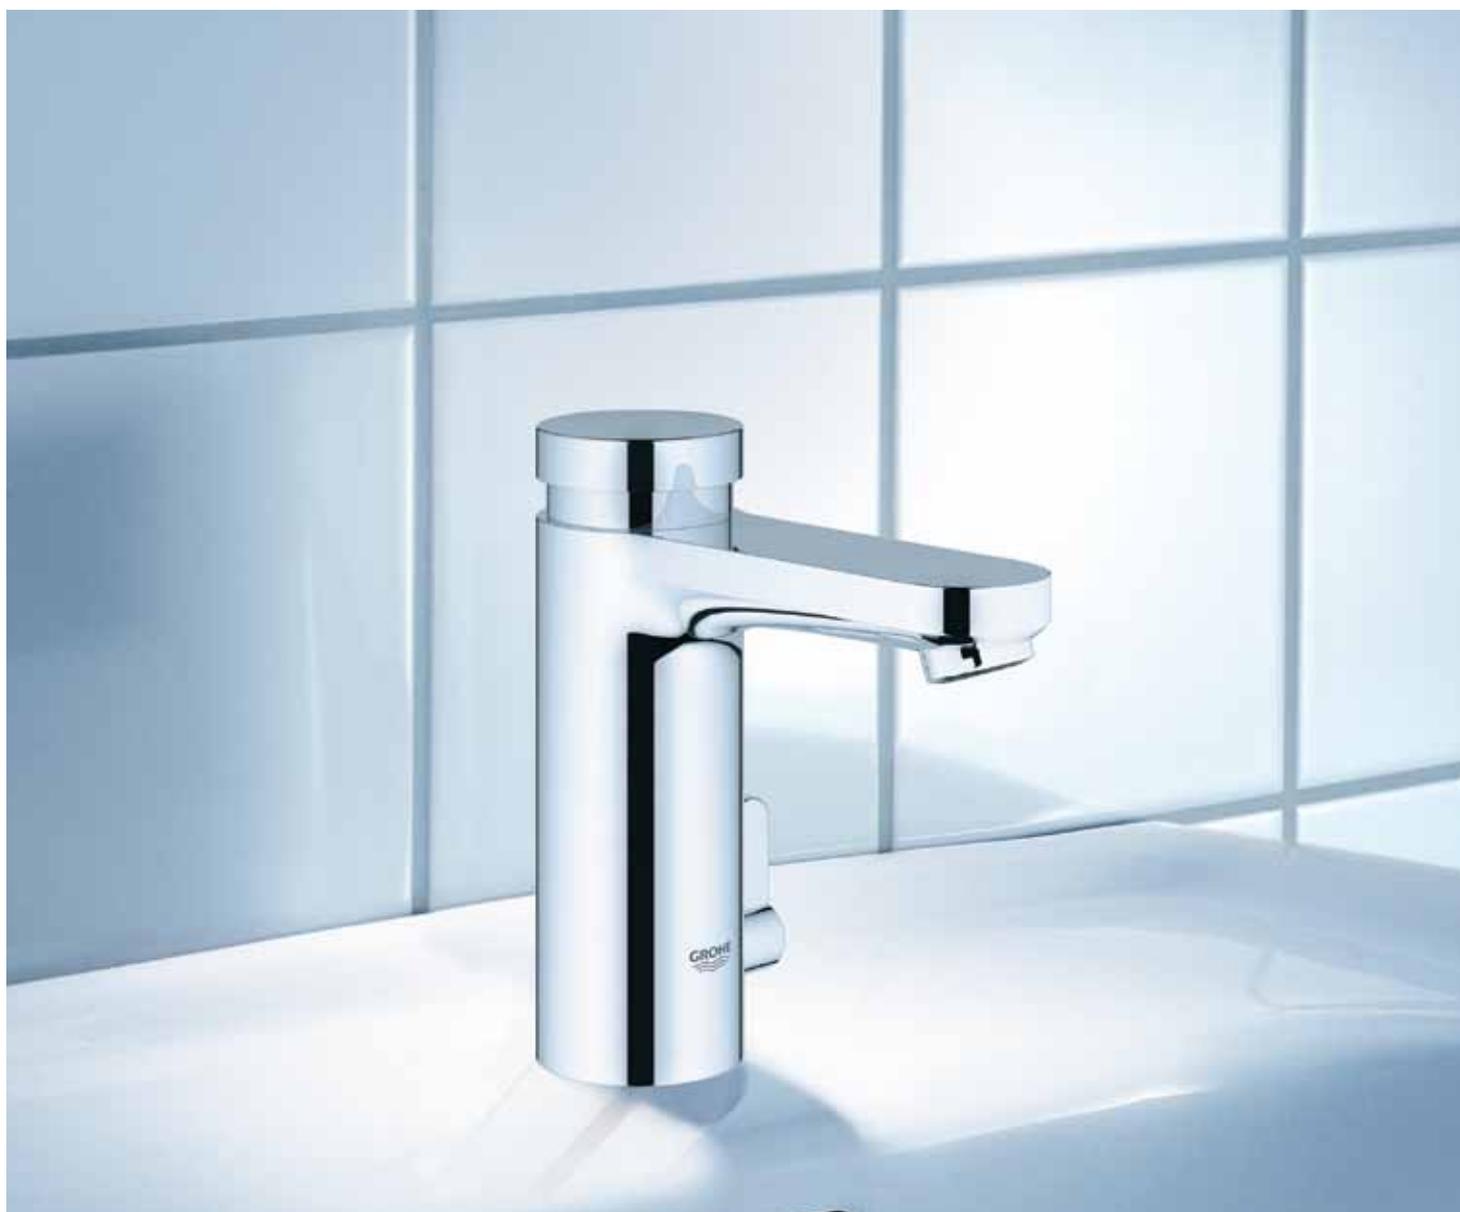

GROHE EcoJoy™



GROHE StarLight®


GROHE features:
SmartFix

Longevity ensured

High-quality GROHE StarLight® chrome and low-wear stainless steel components in the mixing device ensure longevity. An optional rotation lock for the faucet body and an optional rotation lock for the mousseur finish make the Eurosmart Cosmopolitan S virtually vandal-proof.

Reduce your running costs

Thanks to reduced water and energy consumption, Eurosmart Cosmopolitan S contributes to lowering your operating costs. This is due to the automatic stop function and the flow limiter which ensure that the water flow is never more than 5.8 l/min at 3 bar and that water is only dispensed when needed. The water temperature can easily be adjusted using the lever on the side.

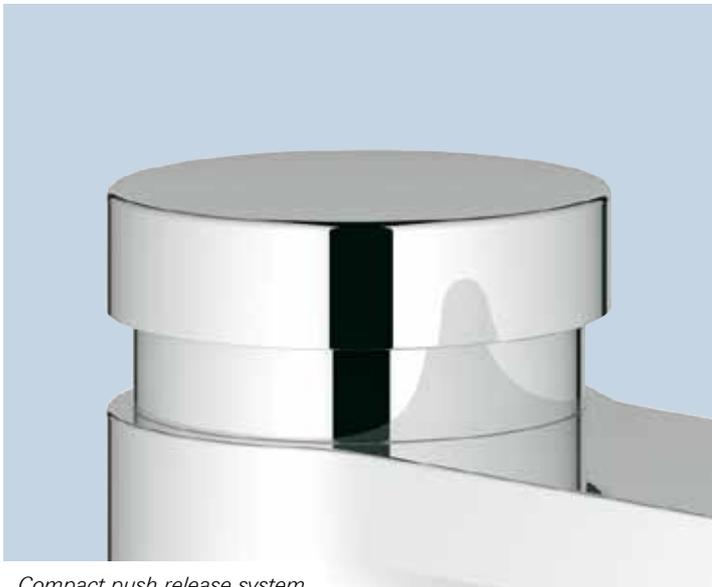

Compact push release system




Swivel spout



Temperature control

GROHE EUROSMART COSMOPOLITAN S

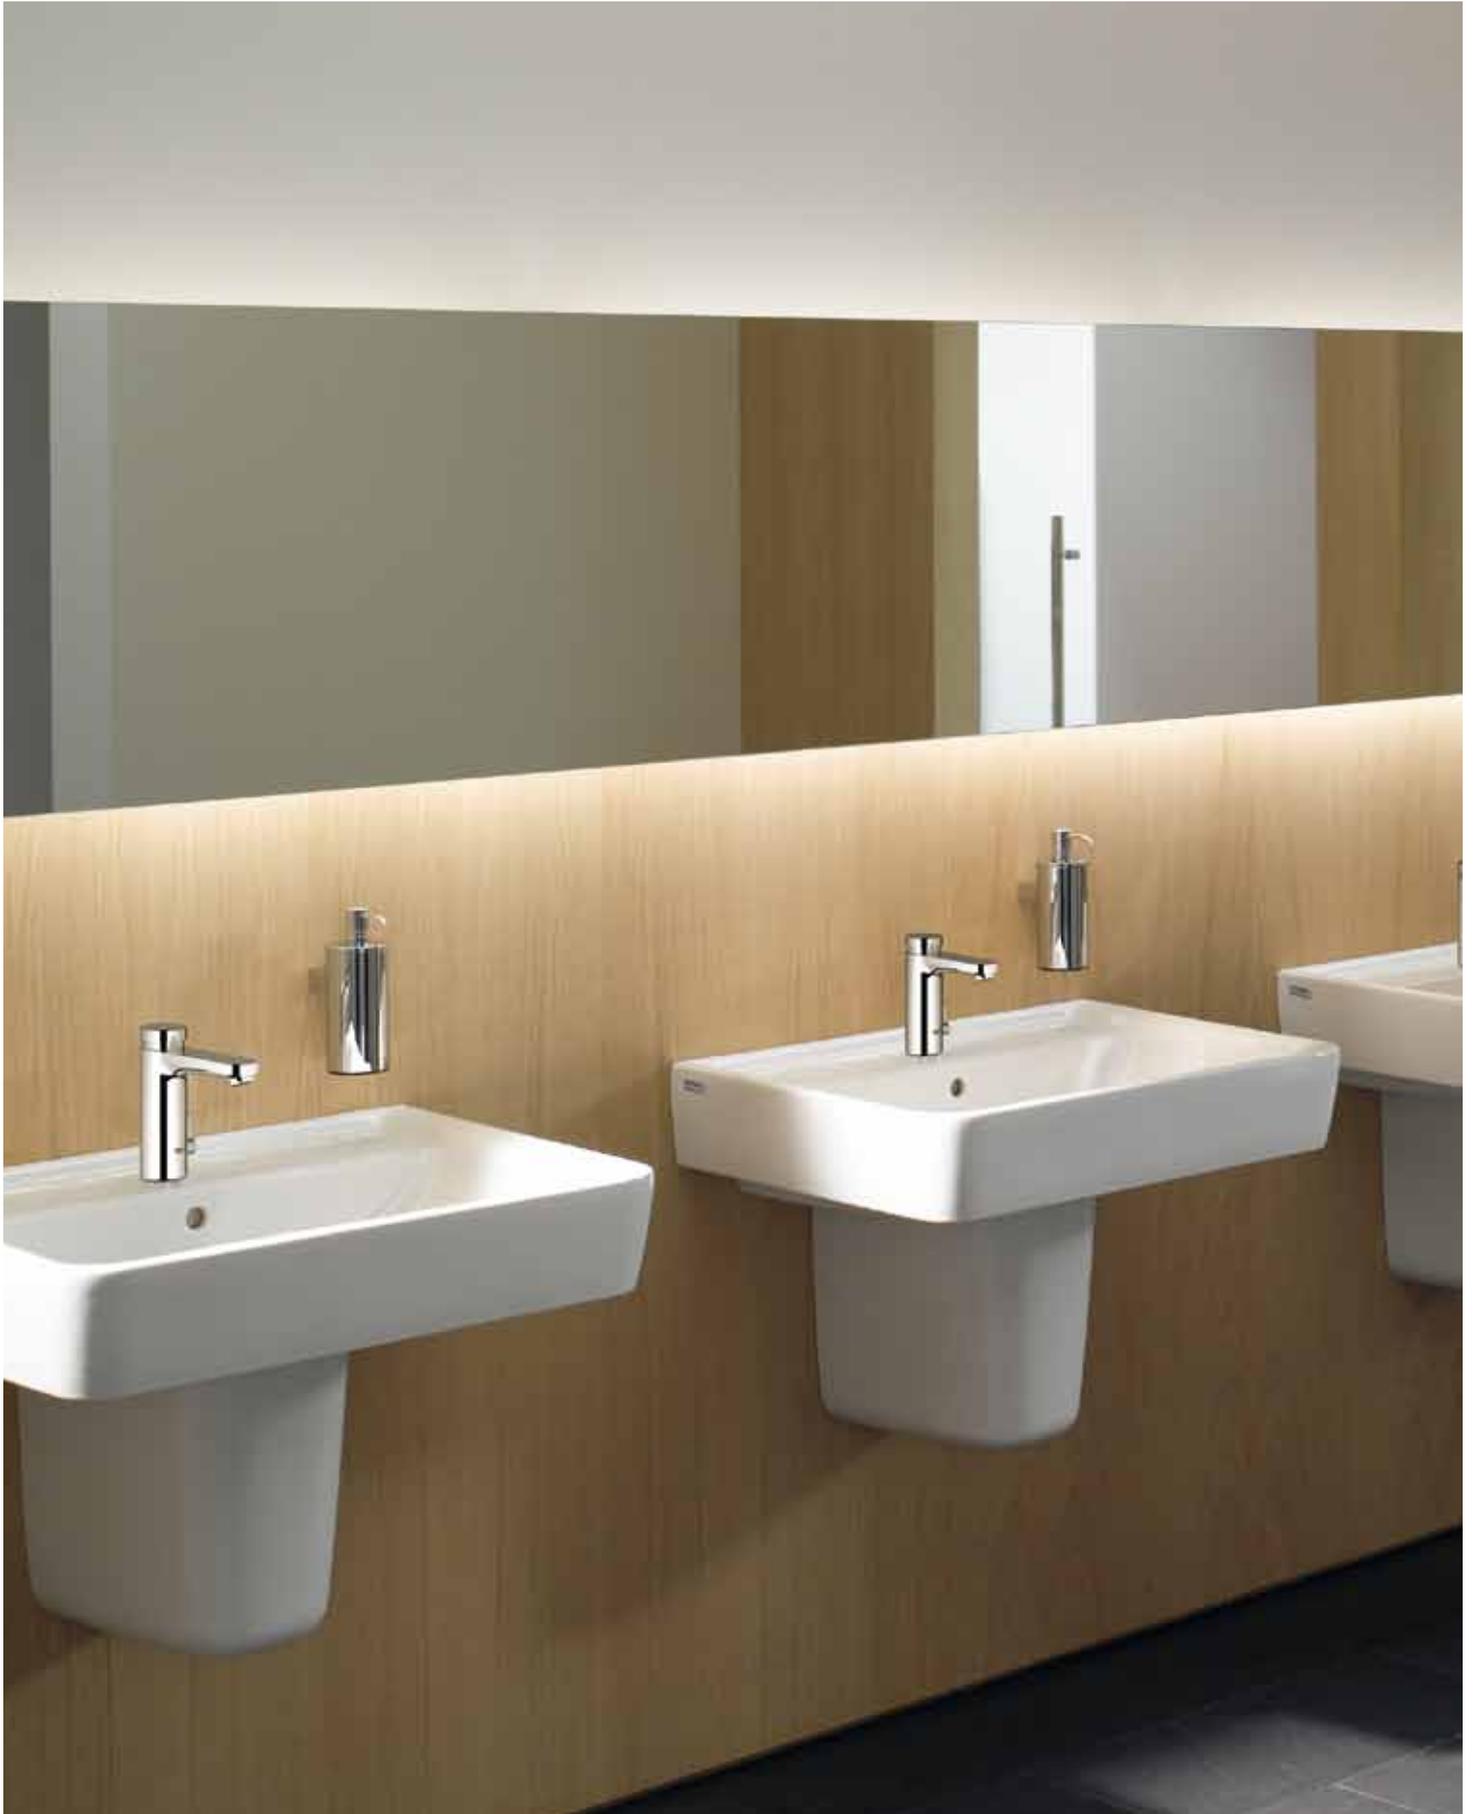


GROHE EcoJoy™



GROHE StarLight®

GROHE features:
SmartFix

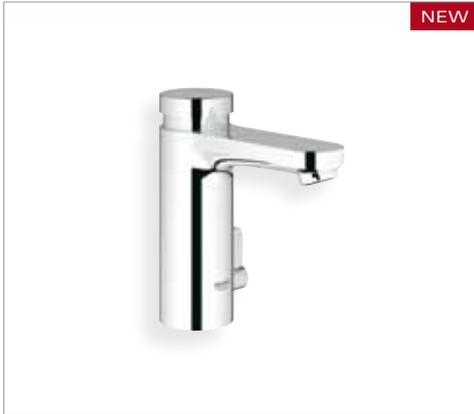


NEW

36 317 000

Eurosmart Cosmopolitan S

Self-closing basin mixer with mixture, single hole installation, mixing device with hot water stop valve

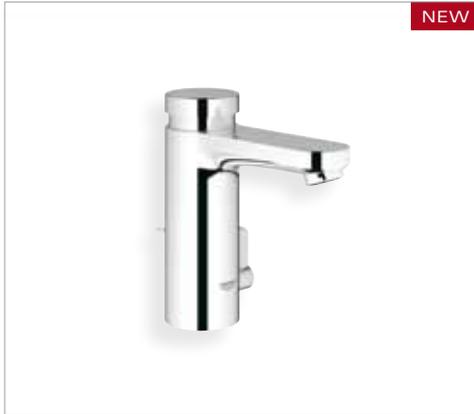


NEW

36 318 000

Eurosmart Cosmopolitan S

Self-closing basin mixer with mixture, pop-up waste set 1 1/4", single hole installation, mixing device with hot water stop valve

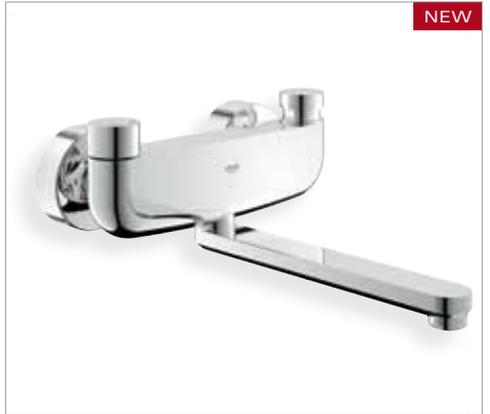

NEW

36 319 000

Eurosmart Cosmopolitan S

Self-closing basin mixer 1/2" with mixing device, swivel cast spout 250 mm, swivel range stop at 130°, lockable, mixing device with hot water stop valve



NEW

36 321 000

Eurosmart Cosmopolitan S


Self-closing shower mixer with mixture, set for final installation for concealed fitting box, chrome escutcheon, mixing device with hot water stop valve



NEW

36 322 000

Concealed mounting box with mixture, suitable for self-closing final installation sets, with adhesive flange, 2 stop valves

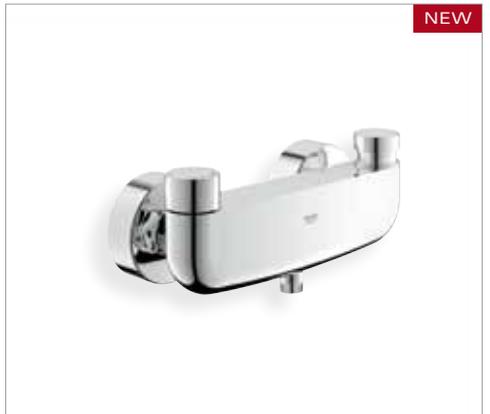

NEW

36 320 000

Eurosmart Cosmopolitan S

Self-closing shower mixer 1/2" with mixture, hose connection G 1/2" and G 3/4", wall mounted, mixing device with hot water stop valve

GROHE EUROECO COSMOPOLITAN S

Uniting cosmopolitan design with the convenience of a self-closing fitting, Euroeco Cosmopolitan S delivers a wealth of features at a highly competitive price. Its smart silhouette utilises a keyhole-shaped spout and a smooth, conical body to bring a modern aesthetic to wash basins and showers in public sanitary facilities. Robust design, reliable GROHE technologies and an entry-level price point make Euroeco Cosmopolitan S a sensible long-term investment.



GROHE EcoJoy™



GROHE StarLight®

Less water – perfect flow

Being a self-closing faucet, the Euroeco Cosmopolitan S prevents water from flowing unintentionally or being wasted deliberately. The flow interval for the basin mixers come preset at seven seconds and can easily be changed to 15 or 30 seconds.

Durable and safe

Supplying only the amount of water that is actually needed, the tried-and-tested cartridge technology ensures low operating costs. The high-quality, scratch-resistant GROHE StarLight® chrome finish and the absence of edges and corners mean that Euroeco Cosmopolitan S is virtually immune to attack by vandals or dirt. An optional rotation lock helps protect the mousseur against manipulation.



Disassemble cartridge



Flow time adjustable to 7, 15 or 30 sec.



Flow limiter 7.5 l

GROHE
EUROECO COSMOPOLITAN S



GROHE EcoJoy™



GROHE StarLight®

NEW



36 265 000

Euroeco Cosmopolitan S

Self-closing pillar tap 1/2", single hole installation, marking: blue/red

NEW



36 266 000

Euroeco Cosmopolitan S

Self-closing pillar tap 1/2", single hole installation, marking: blue/red

NEW



36 268 000

Euroeco Cosmopolitan S

Self-closing gate valve 1/2", for concealed installation, marking: blue/red

NEW



36 267 000

Euroeco Cosmopolitan S

Self-closing shower valve 1/2", exposed installation, marking: blue/red

GROHE THERMOSTATS

GROHE thermostats provide optimum comfort, high economy of operation and maximum safety: The water immediately reaches the desired temperature which is reliably maintained. No more fiddling with controls to get the temperature right! GROHE thermostats for basins and showers instantly compensate for variations in water temperature and pressure. In the most extreme case, i.e. should the supply of cold water fail, the hot water shuts off automatically to prevent scalding. Protection from scalding is particularly important where the water is temporarily heated to very high temperatures in order to ensure perfectly hygienic water - e.g. to prevent the formation of legionellae. GROHE thermostats combine optimum comfort with maximum safety and highly economical operation.





GROHE THERMOSTATS

The perfect combination of comfort and safety.

Typical areas of application:

- Public swimming pools
- Nursing homes
- Kindergartens
- Hotels
- Health sector

Typical demands:

- Security
- Water hygiene
- Comfort
- Economy



Hotel Mardavall, Mallorca/Spain



*Ozeaneum Stralsund/Germany
Photo: Johannes Maria Schlorke*



*KWS Saat AG, Einbeck/Germany
Photo: Sören Meyer*





Swissôtel Le Plaza, Basel, Switzerland

GROHTHERM XL

For sports facilities, gyms and saunas, in fact anywhere that group showers or basins are installed; Grohtherm XL is the safe solution. With a flow rate between 9 and 140 l/min, the central thermostat features GROHE TurboStat® technology to ensure the water temperature at each shower remains constant, irrespective of any variations in the water pressure or flow rate. Grohtherm XL is available for wall-mounted (1", 1¾") and concealed (1") installation.



GROHE TurboStat®



GROHE CoolTouch®



GROHE StarLight®

Easy settings for maximum safety

To match the differing requirements of each installation, the maximum water temperature can be pre-set to between 33° C and 43° C by means of the ergonomically shaped scale handle or concealed controls, which can only be re-set using a special key. GROHE TurboStat®, our leading thermostat technology, ensures a constant water temperature for the duration of each user's shower, by responding to any fluctuations in the water temperature or pressure within a fraction of a second. Additionally, should there be a failure in the incoming cold water supply; the thermostat will automatically shut down.

Perfect appearance

Smooth surfaces finished in GROHE StarLight® chrome, which resists dirt and tarnishing, make this fitting particularly easy to clean.



35 085 000 Grotherm XL

Thermostatic mixer, 1", wall-mounted, temperature selector with safety stop, connection 1 1/4", outlet 1 1/2"



35 087 000 Grotherm XL

Thermostatic mixer, 1/4", wall-mounted, temperature selector with safety stop, connection 1 1/2", outlet 2"



35 003 000 Grotherm XL

Thermostatic mixer, 1", concealed installation, temperature selector with safety stop, connection 1 1/4", outlet 1 1/4"



47 569 000 Grotherm XL

Loose key and shield



12 124 000 Grotherm XL

Mixed water circulation connection, flexible connection hose, 3/4" x 3/4", 90° angle, for connection to existing circulation pipe

GROHTHERM 2000 SPECIAL

Constant temperature, water-saving, easy to grip – reliable protection from scalding and the possibility to save water by pre-setting the maximum flow rate make the Grohtherm 2000 Special thermostat the perfect solution for contract environments. Its standard winged handles allow the flow rate to be limited and the maximum water temperature to be set between 35° C and 43° C. And thanks to GROHE CoolTouch® technology, the entire outer surface of our Grohtherm 2000 models never exceeds the temperature of the water itself so there's no risk of scalding yourself on a hot chrome surface.



GROHE EcoJoy™



GROHE TurboStat®



GROHE CoolTouch®



GROHE StarLight®

GROHE features:
SafeStop
EcoButton
AquaDimmer
EasyLogic
SafetyPlus
ErgoTouch



Safe water regulation and scalding protection according to DIN

The DIN EN 806-2 standard requires protection against scalding from hot water or the surfaces of fittings. GROHE thermostats such as the Grohtherm 2000 Special, include an adjustable temperature limiter as well as the **GROHE CoolTouch®** technology which prevents the outer surface from becoming too hot to touch.

Engineered for effective protection

All GROHE thermostats are based on the **GROHE TurboStat®** technology that mixes cold and hot water reliably and constantly as desired. Our thermostats react instantly to temperature and pressure changes and balance them automatically. In case of a sudden cold water disruption, e.g. due to a burst in a water pipe, this sophisticated technology stops the flow immediately to rule out the risk of scalding from unmixed hot water.

No chance for germs

Thermal disinfection of supply pipes and fittings is widely used as an effective measure against potential sources of infection in drinking water installations. Water heated to a temperature of 70° C is used to kill potential pathogens like legionellae and removing biofilms and other undesirable deposits from the pipes. **GROHE SafetyPlus** greatly facilitates thermal disinfection routines. The fitting can be set for thermal disinfection in next to no time. Subsequent readjustment of the thermostat is not required.

GROHTHERM 2000 SPECIAL



34 202 000

Grotherm 2000 Special

Thermostat bath mixer, 1/2", GROHE CoolTouch® safety housing, automatic diverter bath/shower, mousseur, temperature scale handle with safety stop



34 205 000

Grotherm 2000 Special

Thermostat shower mixer, 1/2", GROHE CoolTouch® safety housing, volume handle with economy stop, temperature scale handle with safety stop



34 203 000

Grotherm 2000 Special

Thermostat mixer, 1/2", for multi-way use, GROHE CoolTouch® safety housing, volume handle with economy stop, temperature scale handle with safety stop



34 254 000

Grotherm 2000 Special

Thermostat bath mixer, 1/2", GROHE CoolTouch® safety housing, GROHE TurboStat® compact cartridge, Aquadimmer, temperature scale handle with safety stop



34 255 000

Grotherm 2000 Special

Thermostat shower mixer, 1/2", GROHE CoolTouch® safety housing, GROHE TurboStat® compact cartridge, volume handle with economy stop



19 418 000

Grotherm 2000 Special

Central thermostatic mixer, set for final installation for 35 500 000, temperature scale handle with safety stop



19 416 000

Grotherm 2000 Special

Thermostatic shower mixer, set for final installation for 35 500 000, temperature scale handle with safety stop, volume handle with economy stop



19 417 000

Grotherm 2000 Special

Thermostat with integrated 2-way diverter for bath or shower, set for final installation for 35 500 000, temperature scale handle with safety stop, volume handle with economy stop



35 500 000 Grohe Rapido T

Universal thermostatic mixer for concealed installation, stop valve integrated in finishing trim set, concealed body for 19 416 000, 19 417 000 and 19 418 000



GROHE EcoJoy™



GROHE TurboStat®



GROHE CoolTouch®



GROHE StarLight®

GROHE features:
SafeStop
EcoButton
AquaDimmer
EasyLogic
SafetyPlus
ErgoTouch



47 764 000
Grotherm 2000 Special
Unlocking handle



47 735 000
Grotherm 2000 Special
Handle for disabled use, antibacterial equipped material, to be mounted on volume handle



12 051 000
S-union, lockable, 1/2" x 3/4", screw socket for covering union nut and escutcheon, sealing towards wall, adjustment range 12.5 mm



13 460 000
Cast swivel spout, projection 75 mm, swivelling and lockable, laminar flow straightener 9 l/min., coupling nut 3/4"



13 461 000
Cast swivel spout, projection 115 mm, swivelling and lockable, economy mousseur, coupling nut 3/4"



13 462 000
Cast swivel spout, projection 175 mm, swivelling and lockable, economy mousseur, coupling nut 3/4"

GROHTHERM MICRO

Grotherm Micro offers innovative technology for safety in the smallest space. With its excellent protection from scalding it suits the needs of plumbers and property managers alike. Easy to install or retrofit, this safe and efficient micro-thermostat can be combined with any single-hole mixer. Its small dimensions permit installation under a basin.



GROHE TurboStat®



GROHE StarLight®

GROHE features:
SafeStop
SafetyPlus

Thermostatic protection ensures maximum safety.

Single-lever mixers, self-closing valves or electronic fittings are used for basins in public and contract environments. However, variations in pressure or failure of the cold water supply may result in an undesirable and even hazardous temporary increase in the temperature of the mixed water. Grohtherm Micro solves this problem by limiting the maximum water temperature. Users are effectively protected against scalding by hot water which can often exceed 60° C. This permits easy compliance with hospital regulations and industrial safety standards as well as accident prevention rules.

Temperature limiter hidden underneath the wash basin.

Easy to install or retrofit, this safe and efficient micro-thermostat protects users from variations in temperature by limiting the hot water temperature.

Tamper-proof temperature adjustment.

Temperature adjustment protection is twofold, to prevent tampering: Firstly, the cover can be replaced by an optional metal cover (47 652 000). This alternative cover requires tools for removal. Secondly, the temperature adjustments can only be made with a hexagon socket wrench.

Precise temperature control for pillar valves without water temperature regulation.

When specified in combination with electronic or self-closing fittings without water temperature regulation, Grohtherm Micro enables precise temperature control of pre-mixed water and therefore reliable protection from scalding.



Temperature control by socket wrench



Fixing scale ring



34 023 000 Grohtherm Micro

Thermostatic scalding protection/under-basin thermostat, for installation on the angle valve



47 533 000

Connecting set for fittings with mixer



45 704 000

Connecting set for fittings without mixer

GROHTHERM ERGOMIX

Grotherm Ergomix is unbeatable in medical specification:

- Extremely easy to operate and adjust.
- Thermal disinfection is very simple: After overriding the safety stop (which can be set between 35° C and 45° C) using a simple tool, it can be thermally disinfected - without having to re-adjust the thermostat after disinfection.
- Safety is ensured: A metal stop on the body controls the flow rate and an adjustable safety stop limits the maximum temperature to prevent scalding.
- Easy to clean: Water drops off immediately from its smooth surfaces.
- S connections are concealed and - optionally - fitted with shut-off valves.



GROHE TurboStat®



GROHE SilkMove®




GROHE StarLight®

GROHE features:
EasyLogic
SwivelStop
SafeStop
SafetyPlus
ErgoHandle



Adjustment safety stop

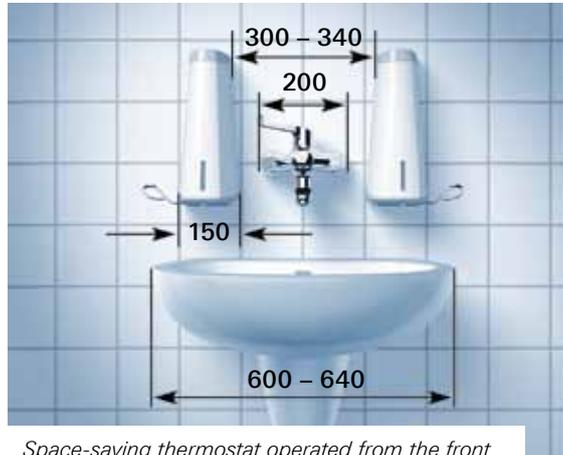

Space-saving thermostat operated from the front



Thermal disinfection

Easy to operate and very safe.

GROHE has adapted Ergomix to meet the demands of a washstand in the medical sector. A compact design was required, so that dispensers for soap and disinfectant can also be positioned over the washstand to the right and left of the fitting. Instead of locating the thermostat at the side as usual, it is now conveniently and compactly operated from the front of the Ergomix. This feature is appreciated by doctors and nursing staff.

Ergonomic and comfortable.

Decisions are very often influenced by such small things. The ergonomic long arm lever, 100° swivel range and front-operated thermostat make faucet usage simpler and more convenient.

GROHTHERM ERGOMIX



Nepomuk Klinik, Erfurt/Germany



GROHE TurboStat®



GROHE SilkMove®



GROHE StarLight®

GROHE features:
EasyLogic
SwivelStop
SafeStop
SafetyPlus
ErgoHandle



34 018 000 Grotherm Ergomix
Thermostatic basin mixer, 1/2", lever for elbow operation, metal elbow lever 250 mm, temperature handle with safety stop, easy thermal disinfection, projection 238 mm



34 019 000 Grotherm Ergomix
Thermostatic basin mixer, 1/2", lever for elbow operation, metal elbow lever 170 mm, temperature handle with safety stop, easy thermal disinfection, projection 178 mm



34 020 000 Grotherm Ergomix
Thermostatic basin mixer, 1/2", lever for elbow operation, metal elbow lever 250 mm, temperature handle with safety stop, easy thermal disinfection, projection 255 mm, covered S-unions



34 021 000 Grotherm Ergomix
Thermostatic basin mixer, 1/2", lever for elbow operation, metal elbow lever 170 mm, temperature handle with safety stop, easy thermal disinfection, projection 195 mm, covered S-unions

GROHE SINGLE-LEVER MIXERS

Doctors, nurses or people who find conventional fittings difficult to operate certainly appreciate easier operation. Longer levers, which are easy to reach from the front, facilitate the opening and closing of basin, shower and bathtub fittings. Additional qualities such as hygiene and robust design provide extra benefits.





GROHE SINGLE-LEVER MIXERS


for the health and disability sector:
Ergonomically-shaped levers facilitate
operation.


Typical areas of application:

- Hospitals, surgeries
- Nursing homes
- Laboratories
- Public disabled facilities
- Home care environments

Typical demands:

- Hygiene
- Ergonomics
- Durability
- Safety

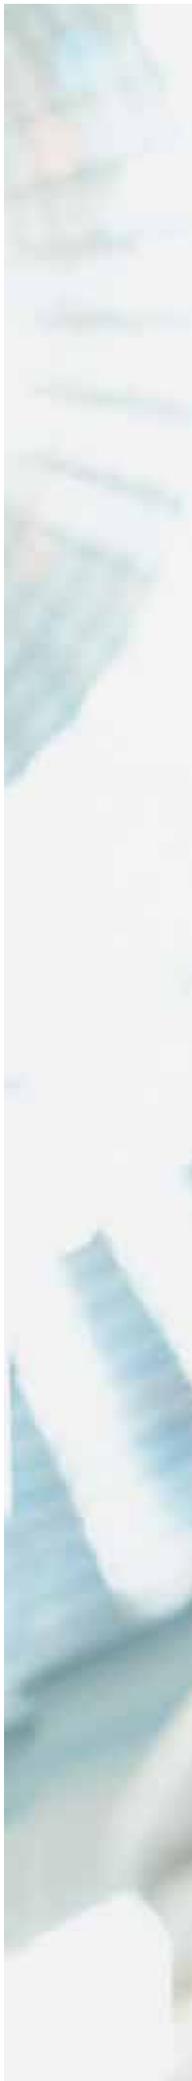

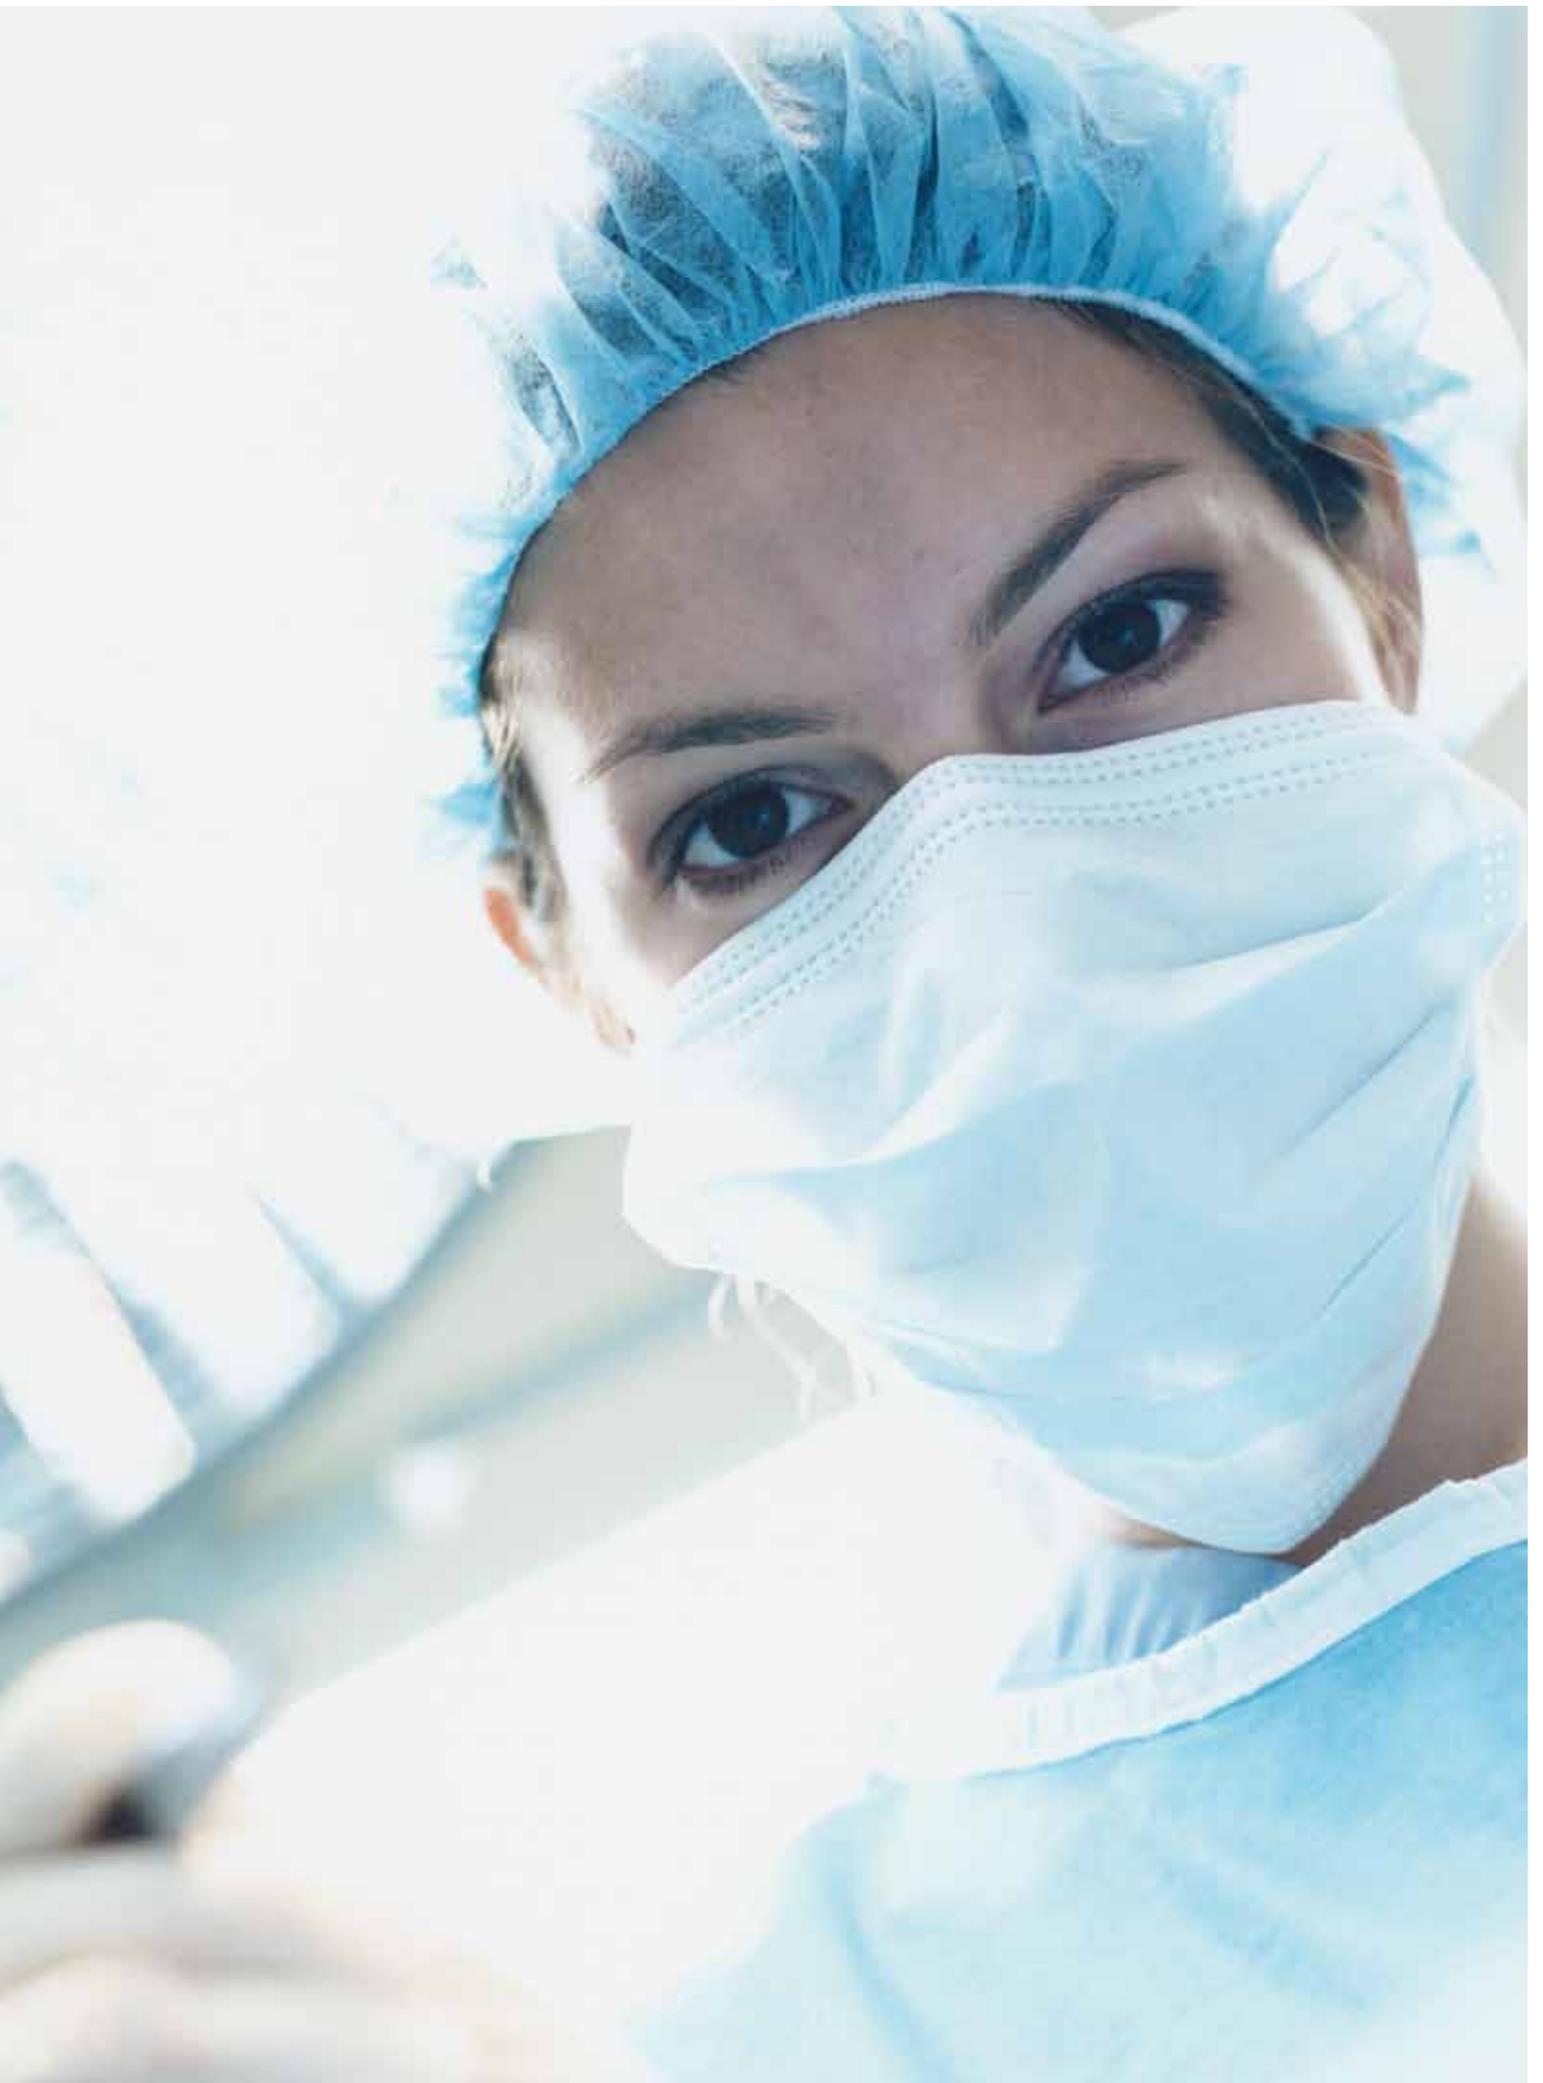

GROHE EUROECO SPECIAL SAFETY MIXERS

Washing your hands with your hands free – this is the idea behind the wall-mounted Euroeco Special safety mixers, designed with the needs of doctors and nurses in mind. Wall-mounted installation keeps the basin free, and in order to reduce the risk of accidents caused by projecting parts, faucet levers and spouts are available in a choice of lengths.



GROHE SilkMove®



GROHE StarLight®

GROHE features:
ErgoTouch
InvisibleFasteningSystem

Comfort and safety for all users

Because the flow rate can be variably pre-set, the robust metal lever only has to be pushed from left to right (left: cold, right: warm; maximum temperature can be pre-set). This helps control both water consumption and energy costs. To spare users from "hot" surprises, the water is always cold when the faucet is first opened.

Exceptional hygiene

A laminar flow prevents bacteria in the air entering the water and the smooth, easy-to-clean surface of the fitting combine to ensure perfectly hygienic water.

Built to last a lifetime

All parts are extremely durable and hardwearing; the swivel spout is, for example, mounted on a particularly stable bearing. Optional S connections with shut-off valve facilitate maintenance.



GROHE EUROECO SPECIAL SAFETY MIXERS



32 790 000 Euroeco Special

Single-lever safety basin mixer, 1/2", single hole installation, adjustable flow rate limiter, laminar flow straightener 9l/min., metal lever 120 mm, temperature limiter



32 788 000 Euroeco Special

Single-lever safety basin mixer, 1/2", single hole installation, adjustable flow rate limiter, laminar flow straightener 9l/min., metal lever 120 mm, temperature limiter, pop-up waste set 1 1/4"



32 789 000 Euroeco Special

Single-lever safety basin mixer, 1/2", single hole installation, adjustable flow rate limiter, laminar flow straightener 9l/min., metal lever 120 mm, temperature limiter



32 794 000 Euroeco Special

Single-lever safety basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast spout, laminar flow straightener 9l/min., projection 156 mm, metal lever 120 mm, temperature limiter



32 795 000 Euroeco Special

Single-lever safety basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast spout, laminar flow straightener 9l/min., projection 204 mm, metal lever 170 mm, temperature limiter



32 791 000 Euroeco Special

Single-lever safety basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast swivel spout, lockable, laminar flow straightener 9l/min., projection 156 mm, metal lever 120 mm, temperature limiter



32 792 000 Euroeco Special

Single-lever safety basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast swivel spout, lockable, laminar flow straightener 9l/min., projection 196 mm, metal lever 120 mm, temperature limiter



32 793 000 Euroeco Special

Single-lever safety basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast swivel spout, lockable, laminar flow straightener 9l/min., projection 256 mm, metal lever 170 mm, temperature limiter



32 796 000 Euroeco Special

Single-lever safety basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, shower bottom outlet 1/2", integrated non-return valve, metal lever 120 mm, temperature limiter



GROHE SikkMove®



GROHE StarLight®

GROHE features:
ErgoTouch
InvisibleFasteningSystem



34 023 000 Grotherm Micro

Thermostatic scalding protection/under-basin thermostat, for installation on the angle valve



47 533 000

Connecting set for fittings with mixer



46 277 000

Temperature limiter

GROHE EUROECO SPECIAL

Featuring an ergonomically-shaped lever Euroeco Special ensures effortless operation for a wide variety of user groups. The combination of a gently curved lever and GROHE SilkMove® technology make it easier to open the faucet as less force is required for the lateral movement when adjusting the water temperature. The design is ideal for basins, bathtubs and showers in private and public sanitary facilities, for disabled users or where the end-user has reduced dexterity. Euroeco Special is available with either a full lever or open lever, with spouts and levers coming in a choice of lengths to meet individual requirements.



GROHE SilkMove®



GROHE StarLight®

GROHE features:
SwivelStop
Covered S-unions
CoveredScrews



Integrated temperature limiter



Hygiene - no corners and edges, flowing forms



Thermostatic scalding protection

Easy operation for hygienic environments

In kindergartens and nursing homes the easy-to-use features facilitate independence. The design is also ideal for public facilities where planners want to cater for user groups with wide ranging needs. For surgeries and laboratories the laminar flow controls plays a key role, as there's no chance of water contamination by bacteria from the air. The length of the operating lever is adapted to the spout length of each individual variant.

Additional scald protection

For safety, the installation of the micro-thermostat Grohtherm Micro on the service valve under the basin provides protection from scalding.




Ergonomics

GROHE EUROECO SPECIAL

New design for the professional solution

GROHE presents a new generation of Euroeco Special faucets integrating the latest project know-how to meet our clients' demands.

Hygiene, ergonomics, durability and safety are reflected in a modern yet timeless design.

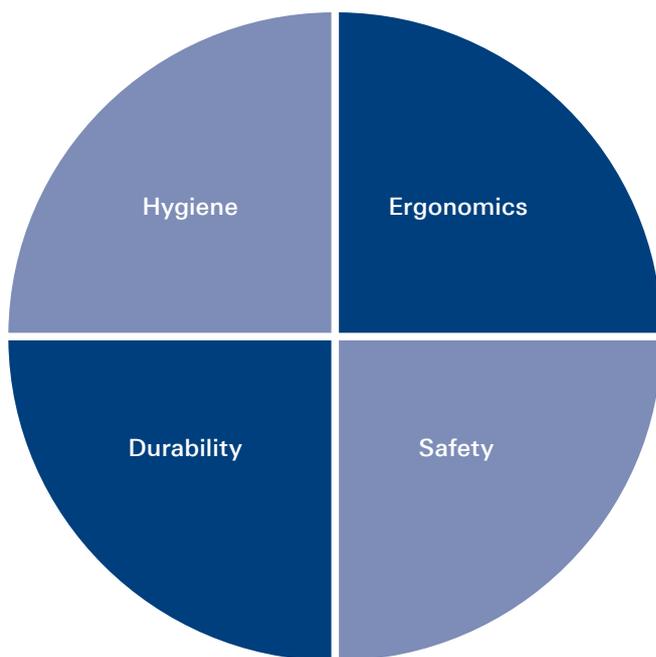

The optimum solution for all applications

From hospitals to care homes; from patients' bathrooms to examination rooms; and from laboratories to kitchens, the new Euroeco Special offers maximum flexibility for all draw-off points.

GROHE StarLight®

Radiant chrome finish resistant to soil and tarnishing - stays like new for years.

Rounded shapes:

- Degressive shapes to avoid accidents
- Smooth curves for easy cleaning
- Lever length matches spout length for convenient operation

Overlapping cap:

- Water drips off for easy cleaning

Smooth waste rod:

- Clear shapes for easy cleaning
- Smooth edges to protect the user



Integrated temperature limiter:

- Maximum temperature can be pre-set to reduce energy costs and for extra safety

ErgoTouch:

- Easiest operation with only a tip of the finger
- Reduced contact areas of the lever
- Strong metal lever

GROHE SilkMove®
Smoothest handling and a lifetime of maintenance-free comfort and reliability

Laminar mousseur:

- No bacteria caught from the air

GROHE EUROECO SPECIAL



32 766 000 Euroeco Special

Single-lever basin mixer grande, 1/2", single hole installation, adjustable flow rate limiter, laminar flow straightener 9l/min., metal lever 120 mm, temperature limiter, pop-up waste set



32 765 000 Euroeco Special

Single-lever basin mixer grande, 1/2", single hole installation, adjustable flow rate limiter, laminar flow straightener 9l/min., metal lever 120 mm, temperature limiter



32 763 000 Euroeco Special

Single-lever basin mixer, 1/2", single hole installation, adjustable flow rate limiter, laminar flow straightener 9l/min., metal lever 120 mm, temperature limiter, pop-up waste set



32 764 000 Euroeco Special

Single-lever basin mixer, 1/2", for open water heater, single hole installation, adjustable flow rate limiter, flow straightener, metal lever 120 mm, temperature limiter, pop-up waste set



32 762 000 Euroeco Special

Single-lever basin mixer, 1/2", single hole installation, adjustable flow rate limiter, laminar flow straightener 9l/min., metal lever 120 mm, temperature limiter



32 776 000 Euroeco Special

Single-lever basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast spout, laminar flow straightener 9l/min., projection 156 mm, metal lever 120 mm, temperature limiter



32 777 000 Euroeco Special

Single-lever basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast spout, laminar flow straightener 9l/min., projection 173 mm, metal lever 120 mm, temperature limiter



32 778 000 Euroeco Special

Single-lever basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast spout, laminar flow straightener 9l/min., projection 204 mm, metal lever 170 mm, temperature limiter



32 779 000 Euroeco Special

Single-lever basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast spout, laminar flow straightener 9l/min., projection 220 mm, metal lever 170 mm, temperature limiter



GROHE SiikMove®



GROHE StarLight®

GROHE features:
SwivelStop
Covered S-unions
CoveredScrews

**32 770 000 Euroeco Special**

Single-lever basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast spout, laminar flow straightener 9l/min., projection 156 mm, metal lever 120 mm, temperature limiter

**32 768 000 Euroeco Special**

Single-lever basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast spout, laminar flow straightener 9l/min., projection 173 mm, metal lever 120 mm, temperature limiter

**32 767 000 Euroeco Special**

Single-lever basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast swivel spout, lockable, laminar flow straightener 9l/min., projection 196 mm, metal lever 120 mm, temperature limiter

**32 771 000 Euroeco Special**

Single-lever basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast swivel spout, lockable, laminar flow straightener 9l/min., projection 213 mm, metal lever 120 mm, temperature limiter

**32 773 000 Euroeco Special**

Single-lever basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast swivel spout, lockable, laminar flow straightener 9l/min., projection 256 mm, metal lever 170 mm, temperature limiter

**32 774 000 Euroeco Special**

Single-lever basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast swivel spout, lockable, laminar flow straightener 9l/min., projection 272 mm, metal lever 170 mm, temperature limiter

**32 775 000 Euroeco Special**

Single-lever basin mixer, 1/2", wall-mounted, adjustable flow rate limiter, cast swivel spout, lockable, laminar flow straightener, projection 341 mm, metal lever 170 mm, temperature limiter

**32 769 000 Euroeco Special**

Single-lever basin mixer, wall-mounted, without S-unions, adjustable flow rate limiter, cast swivel spout, laminar flow straightener 9 l/min., projection 162 mm, metal lever 120 mm, temperature limiter

**32 772 000 Euroeco Special**

Single-lever basin mixer, wall-mounted, without S-unions, adjustable flow rate limiter, cast swivel spout, laminar flow straightener 9 l/min., projection 222 mm, metal lever 170 mm, temperature limiter

GROHE EUROECO SPECIAL



32 781 000 Euroeco Special

Single-lever shower mixer, 1/2", wall-mounted, adjustable flow rate limiter, adjustable temperature limiter, shower bottom outlet 1/2", integrated non-return valve, metal lever 120 mm, with lockable S unions



32 780 000 Euroeco Special

Single-lever shower mixer, 1/2", wall-mounted, adjustable flow rate limiter, adjustable temperature limiter, shower bottom outlet 1/2", integrated non-return valve, metal lever 120 mm



32 782 000 Euroeco Special

Single-lever shower mixer, 1/2", wall-mounted, adjustable flow rate limiter, shower bottom outlet 1/2", integrated non-return valve, metal lever 120 mm, temperature limiter



32 783 000 Euroeco Special

Single-lever bath mixer, 1/2", wall-mounted, adjustable flow rate limiter, automatic diverter bath/shower, integrated non-return valve, metal lever 120 mm, temperature limiter



32 784 000 Euroeco Special

Single-lever shower mixer, 1/2", set for final installation for 35 501 000, metal lever 120 mm, metal escutcheon, temperature limiter



32 785 000 Euroeco Special

Single-lever bath mixer, 1/2", set for final installation for 35 501 000, temperature limiter



35 501 000 GROHE Rapido E

Universal single-lever mixer for concealed installation, for bath and shower



GROHE SilkMove®



GROHE StarLight®

GROHE features:
SwivelStop
Covered S-unions
CoveredScrews



32 786 000 Euroeco Special

Single lever basin mixer, 1/2", single hole installation, adjustable flow rate limiter, swivel tubular spout, laminar flow straightener 9 l/min., metal lever 120 mm, temperature limiter



32 787 000 Euroeco Special

Single lever basin mixer, 1/2", single hole installation, adjustable minimum flow rate approx. 2.5 l/min., swivel tubular spout, laminar flow straightener 9 l/min., metal lever 120 mm, temperature limiter



32 870 000 Euroeco Special

Lever 115 mm, for Euroeco Special single-lever mixer, GROHE StarLight® chrome finish




32 871 000 Euroeco Special

Lever 160 mm, for Euroeco Special single-lever mixer, GROHE StarLight® chrome finish

ENJOY THE INSPIRATION

Like attracts like. Therefore, it's hardly surprising that GROHE products can be found in some of the finest buildings in the world. From luxury hotel suites and spas to the smartest residential addresses, our faucets, showers and fittings are selected by architects and designers looking to treat the end user to a five-star experience.

Our products are reliable, durable and are engineered to perform under the most demanding circumstances. Original designs that make a statement, are intuitive to use and offer exceptional safety, comfort and enjoyment. Which is why those in the know select GROHE, every time.

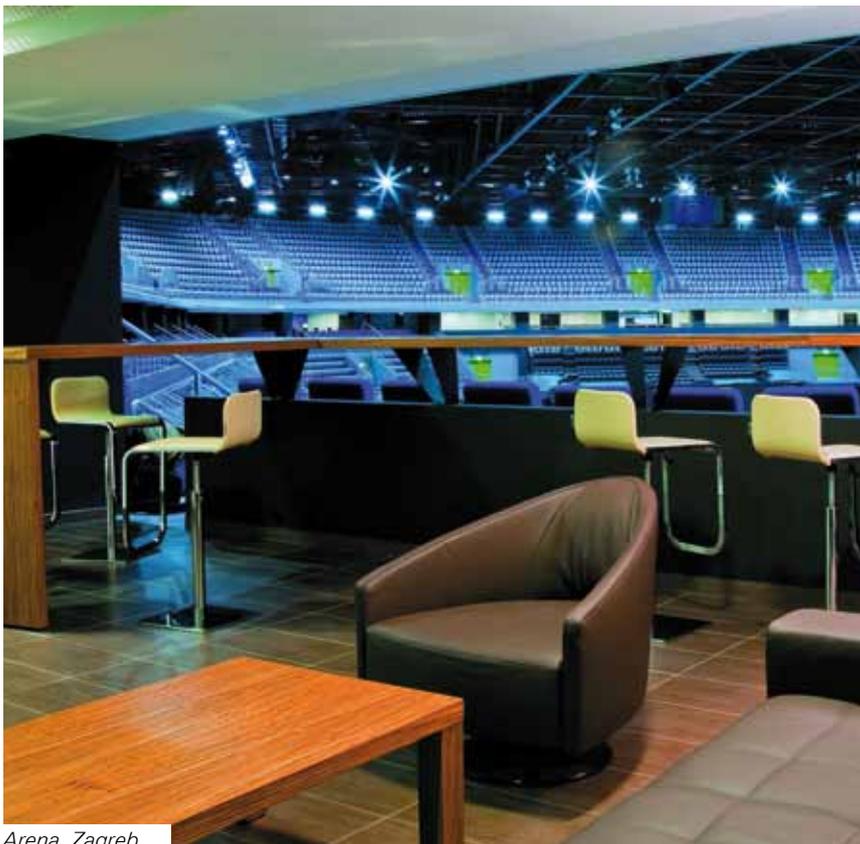


Arena, Zagreb



Rudolf-Harbig Stadion, Dresden




Atrion am Lietzensee, Berlin

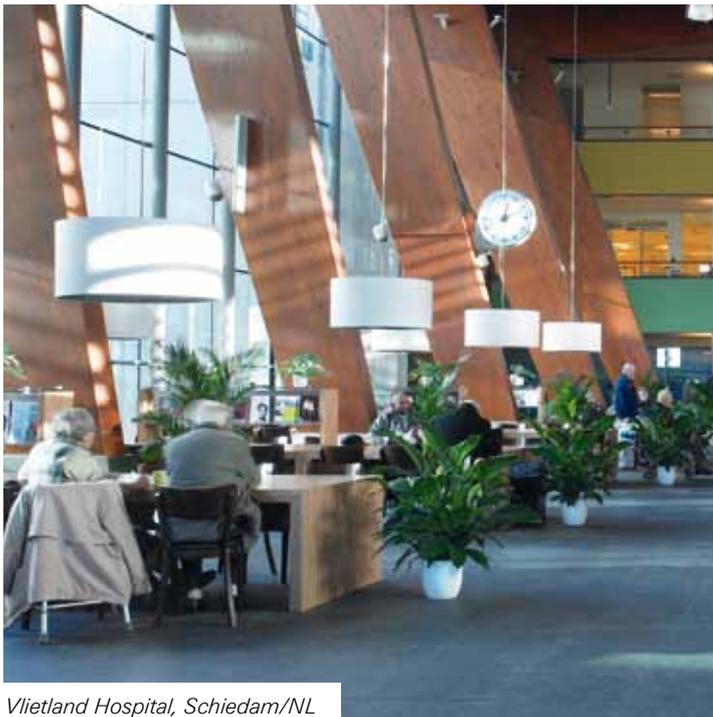

Vlietland Hospital, Schiedam/NL



Opernturm, Frankfurt a.M.

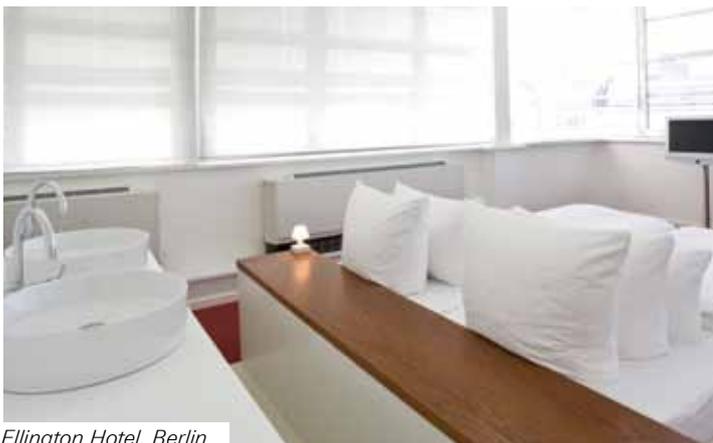

Ellington Hotel, Berlin



Kindergarten Sighartstein, Neumarkt/A

Търговско представителство
„Grohe AG“ България
Ул. Слатинска 1
1574 София
Bulgaria
Tel.: +359 2 971 99 59
Fax: +359 2 971 24 22
grohe-bulgaria@grohe.com
www.grohe.bg
www.pro.grohe.bg

Grohe ČR s.r.o.
V Oblouku 104
252 43 Průhonice - Čestlice
Czech Republic
Tel. +420 225 091 081
Fax: +420 225 091 085
grohe-cz@grohe.com
www.grohe.cz
www.grohe.sk
www.pro.grohe.cz

Grohe AG Grohe
Reprezentanță
Strada Nicolae Iorga nr. 13,
Corp B, parter
RO - 010432 București
Romania
tel.: +40 21 212 50 50
Fax: +40 21 212 50 48
info-ro@grohe.com
www.grohe.ro
www.pro.grohe.ro

Grohe AG
Predstavništvo Adria
Štefanovečka 10
HR - 10000 Zagreb
Croatia
Tel.: +385 (0) 1 29 11 470
Fax: +385 (0) 1 29 10 962
adria-hr@grohe.com
www.grohe.hr
www.pro.grohe.hr

Grohe Polska Sp. z o. o.
ul. Puławska 182
02-670 Warszawa
Poland
Tel.: +48 22 54 32 640
Fax: +48 22 54 32 650
biuro@grohe.com.pl
www.grohe.pl
www.grohepro.pl

Grohe Hungary Kft.
Röppentyű u. 53.
HU-1139 Budapest
Hungary
Tel: +36 1 238 8045
Fax: +36 1 238 0713
info-hu@grohe.hu
www.grohe.hu